Ontario Geological Survey
Aggregate Resources Inventory Paper 9

AGGREGATE RESOURCES INVENTORY OF BLANSHARD TOWNSHIP PERTH COUNTY SOUTHERN ONTARIO

by

Staff of the Engineering and Terrain Geology Section

Ontario Geological Survey

1980

Ontario

Ministry of Natural Resources

Hon. James A.C. Auld
Minister

Dr. J.K. Reynolds
Deputy Minister

© OMNR-OGS 1980

Publications of the Ontario Ministry of Natural Resources, Geological Branch
and price list
are obtainable through the
Ontario Ministry of Natural Resources, Map Unit, Public Service Centre
Queen's Park, Toronto, Ontario
and
The Ontario Government Bookstore
880 Bay Street, Toronto, Ontario

Order for publications should be accompanied by cheque
or money order, payable to the Treasurer of Ontario

ISSN 0708-2061
ISBN 0-7743-4631-0

This report was prepared by: Staff of the Engineering and Terrain Geology Section of the Ontario Geological Survey, Ontario Ministry of Natural Resources, 77 Grenville St., Toronto, M5S 1B3, Telephone (416) 965-1182.

Project Supervisor: A. J. Cooper
Text Prepared by: J. Z. Frazer
Compilation and Drafting by: Staff of the Aggregate Assessment Office

Parts of this publication may be quoted if credit is given to the Ontario Ministry of Natural Resources, Ontario Geological Survey. It is recommended that reference to this report be made in the following form:

Ontario Geological Survey
1980: Aggregate Resource Inventory of Blanshard Township, Perth County; Ontario Geological Survey, Aggregate Resources Inventory Paper 9, 31p., 6 tables, 3 maps, scale 1:50 000.

Every possible effort is made to insure the accuracy of the information contained in this report but the Ministry of Natural Resources does not assume any liability for errors that may occur. Source references are included in the report and users may wish to verify critical information.

CONTENTS

Page

Abstract v
Introduction 1
Part I - Inventory Methods 2
Field and Office Methods 2
Resource Tonnage Calculation Techniques 2
Sand and Gravel Resources 2
Bedrock Resources 3
Units and Definitions 3
Part II - Data Presentation and Interpretation 4
Map 1 Distribution of Sand and Gravel Deposits 4
Map 2 Selected Sand and Gravel Resource Areas 4
Site Specific Criteria 5
Deposit Size 5
Aggregate Quality 5
Location and Setting 6
Regional Considerations 6
Map 3 Bedrock Resources 7
Selection Criteria 7
Selected Resource Areas 7
Part III - Assessment of Aggregate Resources in Blanshard Township 9
Location and Population 9
Physiography and Surficial Geology 9
Extractive Activity 9
Selected Sand and Gravel Resources 10
Selected Sand and Gravel Resource Area 1 10
Selected Sand and Gravel Resource Area 2 10
Selected Sand and Gravel Resource Areas 3 and 4 10
Selected Sand and Gravel Resource Area 5 10
Selected Sand and Gravel Resource Area 6 11
Sand and Gravel Resources of Secondary Significance 11
Bedrock Geology 11
Selected Bedrock Resources 11
Selected Bedrock Resource Area 1 12
Summary 12
References 20
Appendix A Suggested Additional Reading 21
Appendix B Glossary 22
Appendix C Geology of Sand and Gravel Deposits 25
Appendix D Geology of Bedrock Deposits 28

TABLES

1 - Total Sand and Gravel Resources, Blanshard Township 13
2 - Sand and Gravel Pits, Blanshard Township 14
3 - Selected Sand and Gravel Resource Areas, Blanshard Township 16
4 - Total Identified Bedrock Resources, Blanshard Township 17
5 - Quarries, Blanshard Township 18
6 - Selected Bedrock Resource Areas, Blanshard Township 19

FIGURES

1 - Key Map Showing Location of Blanshard Township v
2 - Bedrock Geology of Southern Ontario 28

MAPS
(back pocket)

1 - Distribution of Sand and Gravel Deposits, Blanshard Township, Scale 1:50 000.
2 - Selected Sand and Gravel Resource Areas, Blanshard Township, Scale 1:50 000.
3 - Bedrock Resources, Blanshard Township, Scale 1:50 000.

ABSTRACT

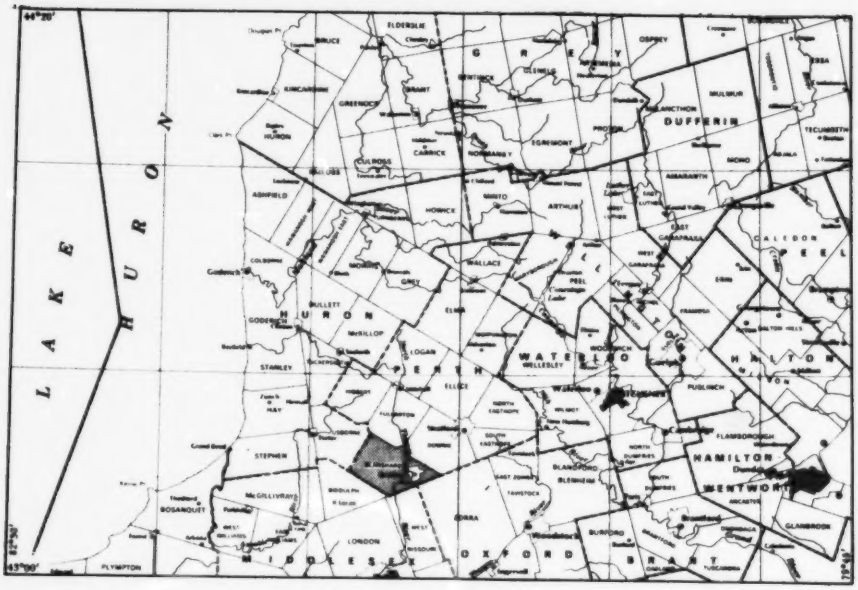

Figure 1. Key Map Showing Location of Blanshard Township. Scale 1:1 800 000.

An inventory and evaluation of aggregate resources, which includes crushed stone derived from bedrock as well as natural sand and gravel, was completed for Blanshard Township in 1979. This is part of the Aggregate Resources Inventory Program for townships and municipalities designated under The Pits and Quarries Control Act, 1971. The aggregate resources in the township have been assessed according to standards developed for the Program.

In Blanshard Township, six areas containing significant amounts of sand and gravel have been selected for possible resource protection. Selected Sand and Gravel Resource Areas compose 870 acres (350 ha), exclusive of licenced areas. An estimated 600 acres (243 ha) are currently available for extraction, containing possible resources of approximately 28 million tons (25 million tonnes). The available portions of the Selected Areas represent 20 percent of the total area occupied by sand and gravel deposits in the township and 28 percent of the total resource tonnage.

Selected Sand and Gravel Resource Area 1, west of St. Marys, constitutes the most important natural aggregate deposit in the township. The Area contains an estimated 11 million tons (10 million tonnes) of sand and crushable gravel suitable for a wide range of road-building and construction uses.

Other Selected Sand and Gravel Resource Areas occupy parts of several deposits in the south-central and northern portions of the township. Presently available resources are estimated to be 17 million tons (15 million tonnes).

Blanshard Township has possible resources of sand and gravel which should be sufficient for local needs in the near future. Care should be taken to ensure the continuing availability of the remaining resources.

The bedrock occurring in Blanshard Township belongs to the Detroit River Group and the Dundee Formation. Neither unit provides rock suitable for the production of road-building and construction aggregates. However, the Dundee Formation is quarried for lime to be used in cement manufacture. One area has been selected for resource protection. The area contains possible resources of approximately 48 million tons (44 million tonnes).

Selected Resource Areas are not intended to be permanent, single land use units which must be incorporated in an official planning document. They represent areas in which a major resource is known to exist. Such resource areas may be reserved wholly or partially for extractive development and/or resource protection within the context of the official plan.

AGGREGATE RESOURCES INVENTORY OF BLANSHARD TOWNSHIP

BY
STAFF OF THE ENGINEERING
AND TERRAIN GEOLOGY SECTION

INTRODUCTION

Mineral aggregates, which include bedrock-derived crushed stone as well as naturally formed sand and gravel, constitute the major raw material in Ontario's road-building and construction industries. Very large amounts of these materials are used each year throughout the Province. For example, in 1976, the total tonnage of mineral aggregates extracted was greater than that of any other metallic or nonmetallic commodity mined in the Province (Ontario Ministry of Natural Resources 1977).

Although mineral aggregate deposits are plentiful in southern Ontario, they are fixed-location, nonrenewable resources which can be exploited only in those areas where they occur. Mineral aggregates are characterized by their high bulk and low unit value so that the economic value of a deposit is a function of its proximity to a market area as well as its quality and size. The potential for extractive development is usually greatest in urban fringe areas where land use competition is extreme. For these reasons the availability of adequate resources for future development is now being threatened in some areas.

Comprehensive planning and resource management strategies are required to make the best use of available resources, especially in those areas experiencing rapid development. Such strategies must be based on a sound knowledge of the total mineral aggregate resource base at both local and regional levels. The purpose of the Aggregate Resources Inventory is to provide the basic geological information required to include potential mineral aggregate resource areas in planning strategies and official plans. The reports should form the basis for discussion on those areas best suited for possible extraction. The aim is to assist decision-makers in protecting the public well-being by ensuring that adequate resources of mineral aggregate remain available for future use.

This report is a technical background document, based for the most part on geological information and interpretation. It has been designed as a component of the total planning process and should be used in conjunction with other planning considerations, to ensure the best use of a municipality's resources.

The report includes an assessment of sand, gravel and crushed bedrock. The most recent information available has been used to prepare the reports. As new information becomes available, revisions may be necessary.

PART I - INVENTORY METHODS

FIELD AND OFFICE METHODS

The methods used to prepare the report primarily involve the interpretation of published geological data such as bedrock and surficial geology maps and reports (see References). Wherever possible, field examination of potential resource areas was also undertaken to confirm interpretations made in the office. Field methods included the examination of natural and man-made exposures of granular material. Most observations were made at quarries and sand and gravel pits located from records held by the Ontario Ministry of Transportation and Communications, the Ontario Geological Survey, and by Regional and District Offices of the Ontario Ministry of Natural Resources. Observations made at pit sites included estimates of the total face height and the proportion of gravel- and sand-size fragments in the deposit. Observations were also made of the shape and lithology of the particles. These characteristics are important in estimating the quality and quantity of the aggregate. In areas of limited exposure, test pitting, soil probing and hand-augering techniques were used to assess subsurface materials. Air photos at various scales were used to determine the continuity of deposits, especially in areas of limited subsurface information.

In the office, the pit data were supplemented by information on file with the Engineering Materials Office of the Ontario Ministry of Transportation and Communications. Data contained in these files include field estimates of the depth, composition and "workability" of deposits as well as laboratory analyses of the physical properties and chemical suitability of the aggregate. Information concerning the development history of the pits and acceptable uses of the aggregate is also recorded. The location, size, and depth of extraction of pits licenced under The Pits and Quarries Control Act, 1971 were obtained from records held by Regional and District Offices of the Ontario Ministry of Natural Resources. The cooperation of the above named groups in the compilation of inventory data is gratefully acknowledged.

Water well records, held by the Ontario Ministry of the Environment, were used in some areas to corroborate thickness estimates, or to indicate the presence of buried granular material. These records were used only in conjunction with other evidence. Topographic maps of the National Topographic System, at a scale of 1:50 000, were used as a compilation base for the field and office data. The information was then transferred to a township base map, also at a scale of 1:50 000, prepared by the Cartography Section of the Lands and Waters Group, Ontario Ministry of Natural Resources, for presentation in the report.

RESOURCE TONNAGE CALCULATION TECHNIQUES

SAND AND GRAVEL RESOURCES

Once the interpretative boundaries of the aggregate units have been drawn, quantitative estimates of the possible resources available can be made. Generally, the volume of a deposit can be calculated if its areal extent and average thickness are known or can be estimated. The computation methods used are as follows: First, the area of the deposit, as outlined on the final base map, is calculated in acres. The thickness values used are an approximation of the deposit thickness, based on the face heights of pits developed in the deposit or on subsurface data such as water well logs. Original tonnage values can then be calculated by multiplying the volume of the deposit by 2500 (the density factor). This factor is approximately the number of tons in a one-foot thick layer of sand and gravel, one acre in extent, assuming an average density of 110 pounds per cubic foot.

Tonnage = Area x Thickness x Density Factor

Tonnage calculated in this manner must be considered only as an estimate. Furthermore, such tonnages represent amounts that existed prior to any extraction of material (i.e. original tonnage) (Table 1, Column 4).

The Selected Sand and Gravel Resource Areas in Table 3 represent only those parts of the deposit lying outside licenced areas (Column 2).

Two successive subtractions are made from the unlicenced area. Column 3 accounts for the number of acres unavailable due to the presence of permanent cultural features and their associated setback requirements. Column 4 accounts for those areas that have previously been extracted (e.g. wayside pits are included in this category). The remaining figure is the area of the deposit currently available for extraction (Column 5). The available area is then multiplied by the estimated deposit thickness and the density factor (Column 5 x Column 6 x 2500) to give an estimate of the sand and gravel tonnage presently available for extractive development and/or resource protection.

BEDROCK RESOURCES

The method used to calculate resources of bedrock-derived aggregate is much the same as that described above. The areal extent of favourable bedrock formations overlain by less than 50 feet (15 m) of unconsolidated overburden is determined from bedrock geology maps, drift thickness and bedrock topography maps and from the interpretation of water well records. The measured extent of such areas is then multiplied by the estimated workable thickness of the formation, based on stratigraphic analyses and on estimates of existing quarry faces in the unit. In some cases a standardized estimate of a workable thickness of 60 feet (18 m) is used. Volume estimates are then multiplied by 3600 (the estimated weight in tons of a one-foot thick section of dolostone, one acre in extent, assuming a bulk density of 165 pounds per cubic foot).

Resources of sandstone are calculated using a bulk density estimate of 146 pounds per cubic foot or approximately 3200 tons per acre. Shale resources are calculated on the basis of a bulk density estimate of 150 pounds per cubic foot.

UNITS AND DEFINITIONS

Although most of the measurements and other primary data available for resource tonnage calculations are given in Imperial units, Metric units have also been given in the text and on the tables which accompany the report. The Metric equivalent of the data is shown in brackets after or directly below the corresponding Imperial figures. Data are generally rounded off in accordance with the Ontario Metric Practice Guide (Metric Committee 1975).

The tonnage estimates made for sand and gravel as well as bedrock-derived aggregates are termed possible resources in accordance with terminology of the Ontario Resource Classification Scheme (Robertson 1975,p.7) and with the Association of Professional Engineers of Ontario (1976) (see Glossary, Appendix B).

PART II - DATA PRESENTATION AND INTERPRETATION

Three maps, each portraying a different aspect of the aggregate resources in the municipality, accompany the report. Map 1, "Distribution of Sand and Gravel Deposits", gives a comprehensive inventory of the sand and gravel resources in the report area. Map 2, "Selected Sand and Gravel Resource Areas", shows those deposits which are considered to represent the largest and/or highest quality resources in the area. Map 3, "Bedrock Resources", shows the distribution of bedrock formations, the distribution of overlying unconsolidated sediments, and identifies the Selected Bedrock Resource Areas.

MAP 1: DISTRIBUTION OF SAND AND GRAVEL DEPOSITS

Map 1 is derived directly from the existing surficial geology maps of the area or from air photo interpretation where surficial mapping is incomplete. It shows the extent of sand and gravel deposits within the study area and serves as a base for the calculation of the total sand and gravel resources.

Map 1 presents a summary of all available information related to the quantity and quality of aggregate contained in all the known aggregate deposits in the study area. Much of this information is contained in the symbol which identifies each deposit. The Deposit Symbol is similar to those used in soil mapping and land classification systems commonly in use in North America. The components of the symbol indicate the gravel content, thickness of material, origin (type), and quality limitations for a given deposit. These components are illustrated by the following example:

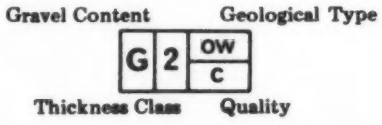

This symbol identifies an outwash deposit 10 to 20 feet (3 to 6 m) thick containing more than 35 percent gravel. Excess fines may limit uses of the aggregate in the deposit.

The "gravel content" and "thickness class" are basic criteria for distinguishing different deposits. The "gravel content" symbol is an upper case "S" or "G". The "S" indicates that the deposit is generally "sandy" and that gravel-sized aggregate makes up less than 35 percent of the whole deposit. "G" indicates that the aggregate probably contains more than 35 percent gravel. If no information is available, the letters are omitted.

The "thickness class" indicates a depth range which is related to the potential resource tonnage for each deposit. Four thickness class divisions have been established as shown in the legend for Map 1.

Two smaller sets of letters, divided from each other by a horizontal line, follow the thickness class number. The upper series of letters identify the geologic deposit type (the types are summarized with respect to their main geologic and extractive characteristics in Appendix C) and the lower series of letters identify the main quality limitations that may be present in the deposit as discussed in the next section.

The other information presented on Map 1 is designed to give an indication of the present level of extractive activity in the study area. Those areas which are licenced for extraction under The Pits and Quarries Control Act, 1971 are shown by a solid outline and identified by a number which refers to the pit descriptions in Table 2. Each description notes the owner, location and licenced acreage of the pit, as well as the estimated face height and percentage gravel. A number of unlicenced pits are also identified and numbered on Map 1 and described in Table 2.

MAP 2: SELECTED SAND AND GRAVEL RESOURCE AREAS

Map 2 is an interpretative map derived from an evaluation of the deposits shown on Map 1. The deposits identified on Map 2 are those which are considered to be important in ensuring an adequate resource base for the future.

All the selected sand and gravel resource areas are first delineated by geological boundaries and then classified into three levels of significance: primary, secondary, and tertiary. These areas are identified on Map 2 by different shading patterns.

Each area of primary significance is assessed as to its probable relative value as a resource in the municipality and is given a deposit number which denotes its ranking order. All such deposits are shown by a medium-grey tone on Map 2.

Selected Aggregate Resource Areas of primary significance are not permanent, single land use units which must be incorporated in an official planning document. They represent areas in which a major resource is known to exist. Such resource areas may be reserved wholly or partially for extractive development and/or resource protection within the context of the official plan.

Deposits of secondary significance are not ranked numerically in this report, but are indicated by a light grey tone on Map 2. Such deposits are believed to contain significant amounts of sand and gravel. Although deposits of secondary significance are not considered to be the "best" resource areas in a municipality, they may contain large quantities of sand and gravel and should be considered an integral component of the aggregate supply of the municipality.

Areas of tertiary significance are indicated on the map by a dashed line but have no grey tone. They are neither rated nor considered to be important resource areas because of their low available resources, or because of possible difficulties in extraction. Such areas may be useful for local needs but are unlikely to support large-scale development.

The process by which deposits are evaluated and selected involves the consideration of two sets of criteria. The main selection criteria are site specific, related to the characteristics of individual deposits. Factors such as deposit size, aggregate quality, and deposit location and setting are considered in the selection of those deposits best suited for extractive development. A second set of criteria involves the assessment of local aggregate resources in relation to the quality, quantity, and distribution of resources in the region in which the municipality is located. The intent of such a process of evaluation is to ensure the continuing availability of sufficient resources to meet possible future demands.

SITE SPECIFIC CRITERIA

DEPOSIT SIZE

Ideally, selected deposits should contain available sand and gravel resources large enough to support a commercial pit operation using a stationary or portable processing plant. In practice, much smaller deposits may be of significant value depending on the overall reserves in the rest of the municipality. Generally, deposits in Class 1, i.e. those thicker than 20 feet (6m) and containing more than 35 percent crushable gravel are considered to be most favourable for commercial development. Thinner deposits may be valuable in municipalities with low total resources.

AGGREGATE QUALITY

The limitations of natural aggregates for various uses result from variations in the lithology of the particles composing the deposit, and from variations in the size distribution of these particles.

Four indicators of the quality of aggregate may be included in the symbol for each deposit on Map 1. They are: gravel content (G or S), fines (C), oversize (O) and lithology (L).

Three of the indicators deal with grain size distribution. The "gravel content", (G or S), indicates the suitability of aggregate for various uses. Deposits containing more than 35 percent crushable gravel are considered to be favourable extractive sites, since this content is the minimum from which crushed products can be economically produced.

Excess "fines" or high silt and clay content may severely limit the potential use of an aggregate. Fines content in excess of 10 percent may impede drainage in road sub-base aggregate and render it more susceptible to the effects of frost action. In asphalt aggregate, excess fines hinder the bonding of particles. Deposits known to have a high fines content are indicated by a "C" in the quality portion of the Deposit Symbol.

Deposits containing more than 20 percent "oversize" particles (those greater than 4 inches (10 cm) in diameter) may also have use limitations. The oversize component is unacceptable for all concrete aggregate and for road-building

aggregate, so must be either crushed or removed during processing. Deposits known to have an appreciable oversize component are indicated by an "O" in the quality portion of the Deposit Symbol.

The other indicator of the quality of an aggregate is "lithology". Just as the unique physical and chemical properties of bedrock formations determine their value for use as crushed rock, so do various lithologies of particles in a sand and gravel deposit determine its suitability for various uses. The presence of objectionable lithologies such as chert, siltstone, and shale, even in relatively small amounts, can result in a reduction in the quality of an aggregate, especially for high-quality uses. Deposits known to contain objectionable lithologies are indicated by an "L" in the quality component of the Deposit Symbol.

If the Deposit Symbol indicates either "C", "O" or "L" or any combination, the quality of the deposit is considered to be reduced for some uses of the aggregate. No attempt has been made to quantify the degree of limitation imposed. Assessment of the four indicators is made from published data, from data contained in files of the Ontario Ministry of Transportation and Communications and the Engineering and Terrain Geology Section of the Ontario Geological Survey, and from field observations. The Engineering Materials Office of the Ontario Ministry of Transportation and Communications has recently compiled a detailed assessment of aggregate suitability for selected areas in southern Ontario. This material has been consulted extensively in preparation of the inventory reports.

LOCATION AND SETTING

The location and setting of a resource area has a direct influence on its value for possible extraction. The evaluation of a deposit's setting is made on the basis of those natural and man-made features which may limit or prohibit extractive development.

First, the physical context of the deposit is considered. Deposits with some physical constraint on extractive development, such as thick overburden or high water table, are less valuable resource areas because of the difficulties involved in resource recovery. Second, permanent man-made features, such as roads, railways, powerlines, and housing developments, which are built on a deposit, may prohibit its extraction. The constraining effect of legally required setbacks surrounding such features is included in the evaluation. A quantitative assessment of these constraints can be made by measurement of their areal extent directly from the topographic maps. The area rendered unavailable by these features is shown for each resource area in Table 3.

The assessment of sand and gravel deposits and bedrock resource areas with respect to local land use and to private land ownership is an important component of the general evaluation process. These aspects of the evaluation process are not considered further in this report but readers are encouraged to discuss them with personnel of the Ontario Ministry of Natural Resources' District Office.

REGIONAL CONSIDERATIONS

In selecting sufficient areas for resource development, it is important to assess both the local and the regional resource base, and to forecast future production and demand patterns.

Some appreciation of future aggregate requirements in an area may be gained by assessing its present production levels and by forecasting future production trends. Such an approach is based on the assumptions that production levels in an area closely reflect the demand and that the present production "market share" of an area will remain at roughly the same level.

The aggregate resources in the region surrounding a municipality should be assessed in order to properly evaluate specific resource areas and to adopt optimum resource management plans. For example, a municipality that has large resources in comparison to its surrounding region constitutes a regionally significant resource area. Municipalities with high resources in proximity to large demand centres, such as metropolitan areas, are special cases.

Although an appreciation of the regional context is required to develop comprehensive resource management techniques, such detailed evaluation is beyond the scope of this report. The selection of resource areas made in this study is based primarily on geological data

or on considerations outlined in preceding sections.

MAP 3: BEDROCK RESOURCES

Map 3 is an interpretative map derived from bedrock geology, bedrock topography, drift thickness maps, water well data from the Ontario Ministry of the Environment, oil and gas well data from the Petroleum Resources Section (Ontario Ministry of Natural Resources), and from geotechnical well data from various sources. Map 3 is based on concepts similar to those outlined for Maps 1 and 2, but displays both the inventory and evaluation on the one map.

The geological boundaries of the labelled bedrock units are shown by a dashed line. Isolated outcrops are indicated by an "X". Three sets of contour lines delineate areas of less than 3 feet (1 m) of drift, areas of 3 to 25 feet (1 to 8 m) of drift, and areas of 25 to 50 feet (8 to 15 m) of drift. The extent of the areas of thin drift are shown by three tones. The darkest tone indicates areas where bedrock outcrops or is within 3 feet (1 m) of the ground surface. These areas constitute potential resource areas of primary significance due to their easy access. The medium tone indicates areas where drift cover is up to 25 feet (8 m) thick. Quarrying is possible in this depth of overburden and these also represent potential resource areas. The lightest tone indicates bedrock areas overlain by 25 to 50 feet (8 to 15 m) of overburden. These latter areas constitute resources which have extractive value only in specific circumstances. Outside of these delineated areas the bedrock can be assumed to be covered by more than 50 feet (15 m) of overburden, a depth generally considered to be too great to allow economic extraction (unless part of the overburden is composed of economically attractive sand and gravel deposits).

Other inventory information presented on Map 3 is designed to give an indication of the present level of extractive activity in the municipality. Those areas which are licenced for extraction under The Pits and Quarries Control Act, 1971 are shown by a solid outline and identified by a number which refers to the quarry descriptions in Table 5. Each description notes the owner, location, and licenced acreage of the quarry and an estimate of face height. Unlicenced quarries are also identified and numbered on Map 3 and described in Table 5. One additional symbol appears on the map: an open dot indicates the location of a selected well which penetrates bedrock. The overburden thickness is shown in feet beside the open dot.

SELECTION CRITERIA

Criteria equivalent to those used for sand and gravel deposits are used to select bedrock areas most favourable for extractive development.

The evaluation of bedrock resources is made primarily on the basis of performance and suitability data established by laboratory testing at the Ontario Ministry of Transportation and Communications. The main characteristics and uses of the bedrock formations found in southern Ontario are summarized in Appendix D.

Deposit "size" is related directly to the areal extent of thin drift cover overlying favourable bedrock formations of sufficient thickness to support quarry operations. Since vertical and lateral variations in bedrock units are much more gradual than in sand and gravel deposits, the quality and quantity of the resource is usually consistent over large areas.

Quality of the aggregate derived from specific bedrock units is established by the performance standards previously mentioned. Location and setting criteria and regional considerations are identical to those for sand and gravel deposits.

SELECTED RESOURCE AREAS

Selection of bedrock resource areas has been restricted to a single level of significance. Three factors support this approach. Quality and quantity variations are gradual. The areal extent of a given quarry operation is much smaller than that of a sand and gravel pit producing an equivalent tonnage of material. Since crushed bedrock has a higher unit value than sand and gravel, longer haul distances can be considered. These factors allow the identification of alternative sites having similar development potential. The wider range of possible resource areas allows greater flexibility in locating quarry operations away from areas of intensive land use competition. The Selected Areas are shown on Map 3 by a line pattern and the calculated available tonnages are given in Table 6.

Selected Bedrock Resource Areas shown on Map 3 are not permanent, single land use units which must be incorporated in an official planning document. They represent areas in which a major bedrock resource is known to exist. Such a resource area may be reserved wholly or partially for extractive development and/or resource protection within the context of the official plan.

PART III - ASSESSMENT OF AGGREGATE RESOURCES IN BLANSHARD TOWNSHIP

LOCATION AND POPULATION

Blanshard Township occupies an area of 47,712 acres (19 309 ha) in the southwest corner of Perth County. The township is shown on portions of the St. Marys (40P/6) and Lucan (40P/3) map sheets of the National Topographic System at a scale of 1:50 000.

There are no major population centres in the township. The Town of St. Marys, located within the township, is the local trade and industrial centre. St. Marys' population has remained relatively stable over the past several years, and in 1978 was 4709. Similarly, rural population throughout the rest of the township has remained relatively stable. The total 1978 population was 2012 people (Ontario Ministry of Intergovernmental Affairs 1979; Ontario Ministry of Treasury, Economics and Intergovernmental Affairs 1974, 1977).

The area is transected by a grid of county and township roads, the majority of which are gravel surfaced.

PHYSIOGRAPHY AND SURFICIAL GEOLOGY

The physiography of the township and the distribution of surficial materials, including sand and gravel deposits, have resulted from extensive glacial activity in the Late Wisconsinan Stage of the Pleistocene Epoch, approximately 18,000 years ago.

The entire region was covered by glacial ice during much of the Late Wisconsinan. A major advance during this time covered the township and deposited a gritty, clayey, silt till which forms a till plain near St. Marys. Fluctuations during the retreat of the ice lobe led to deposition of several till sheets and a series of north-south trending end moraines.

A major fluctuation during the retreat of the ice margin is marked by the Mitchell Moraine, a low broad ridge trending north-south just east of Science Hill. The Thames River, which flows parallel to the moraine, occupies an ice-marginal meltwater channel. The channel carried runoff from the retreating ice sheet and deposited outwash sand and gravel along the Thames Valley, in the vicinity of St. Marys. These deposits constitute large gravel resource areas in the township. Unfortunately, much of the material has been made unavailable by urban development in and around the Town of St. Marys.

During retreat of the ice lobe from the Mitchell Moraine, the Kirkton esker was built by subglacial meltwaters flowing eastward. The Kirkton deposits and those near Science Hill have been exploited for local use in the past and still constitute significant resource areas in Blanshard Township.

Several outwash terrace deposits occur along the valley of the Fish Creek meltwater system where Fish Creek breaches the Mitchell Moraine (Sado and Vagners 1975). These deposits have also been mined for gravel in several places.

Postglacial modifications to the topography of the area have been minor limited to valley downcutting and widening along the Thames River, and to soil formation processes.

EXTRACTIVE ACTIVITY

Because of the fine-grained nature of the tills in the region, little coarse material was available during deglaciation for transportation and deposition in ice-contact or outwash deposits. In addition to the lack of large amounts of coarse aggregate, extensive deposits of fine aggregate may be buried by lacustrine fine sand and silt which cover much of the area (Karrow 1977, p.41). For these reasons, sand and gravel resource areas are scarce in Blanshard Township and in the region as a whole. Therefore, deposits which are known to contain aggregates should be protected for future extraction wherever possible.

Numerous pits have been opened throughout the township. Most of these are small sites, used intermittently to supply material for local use.

Many of the pits have been abandoned since designation of Blanshard Township under The Pits and Quarries Control Act, 1971. At the time of writing, fourteen pits had been licenced under the Act, representing a total of 694.4 acres (281.0 ha). Available resources in the licenced areas are estimated to be 10 million tons (9 million tonnes). Average annual production from pits is 1 million tons (1 million tonnes).

SELECTED SAND AND GRAVEL RESOURCES

Total sand and gravel resources in Blanshard Township cover approximately 2950 acres (1190 ha) and total an estimated 100 million tons (91 million tonnes).

Six deposits have been selected for possible protection. Their total area is 870 acres (350 ha), exclusive of licenced areas. Because of the presence of various cultural constraints and former extractive activity, the area currently available for extraction is estimated to be 600 acres (243 ha). Total possible resources are thus calculated to be approximately 28 million tons (25 million tonnes).

SELECTED SAND GRAVEL RESOURCE AREA 1

Selected Sand and Gravel Resource Area 1 is an outwash deposit located on the western boundary of St. Marys. This deposit is a favourable extractive site. It has good-quality aggregate and extractive land use is established in the vicinity.

Two pits, Nos. 2 and 6, are currently under licence. Pit faces up to 25 feet (8 m) high expose moderately to well sorted, moderately stratified gravel, consisting of 40 to 50 percent crushable material.

Area 1 has an area of 210 acres (85 ha), exclusive of licenced areas. Deletions for cultural setbacks and previously extracted land, reduce the area currently available to 170 acres (69 ha). Assuming an average deposit thickness of 25 feet (8 m), estimated possible resources are 11 million tons (10 million tonnes).

SELECTED SAND AND GRAVEL RESOURCE AREA 2

Substantial possible resources of sand and gravel are available in scattered outwash terrace deposits, east of Kirkton in northern Blanshard Township. These deposits consist of moderately to well sorted sandy gravel, similar to the material in Area 1, but thinner and sandier.

Selected Area 2 is located on the southern edge of Kirkton. Pit faces in the deposit expose 10 to 15 feet (3 to 5 m) of well sorted sandy gravel suitable for pit- and crusher-run aggregate. Selection and sand control are required for crushing in some parts of the deposit due to its sandy texture (Deike 1972).

The selected deposit has an area of 170 acres (69 ha), exclusive of licenced areas. Cultural setback requirements and the extent of former extractive activity reduce the area currently available for extraction to 70 acres (28 ha). Assuming an average deposit thickness of 15 feet (5 m), possible resources are estimated to be 3 million tons (3 million tonnes).

SELECTED SAND AND GRAVEL RESOURCE AREAS 3 AND 4

Selected Sand and Gravel Resource Areas 3 and 4 are outwash terrace deposits flanking Flat Creek in northern Blanshard Township. Although there are no pits developed in either area, the aggregate is probably similar to that found in the terrace deposits further downstream near Science Hill.

Areas 3 and 4 have a combined acreage of 280 acres (113 ha). Deletions for cultural setback requirements leave 250 acres (101 ha) currently available for extraction. Assuming an average deposit thickness of 15 feet (5 m), total possible resources are approximately 8 million tons (7 million tonnes).

SELECTED SAND AND GRAVEL RESOURCE AREA 5

Sand and gravel resources are also available in two outwash deposits at the confluence of Fish Creek and the Thames River. Several pits expose 10 to 25 feet (3 to 8 m) of sandy, well sorted gravel suitable for crushing. Oversize clasts and coarse sand gradation may present some limitations.

Area 5 has an area of 80 acres (30 ha), exclusive of licenced areas. Deletions for cultural setback requirements and previous extractive activity leave 40 acres (16 ha) currently available

for extraction. Assuming an average deposit thickness of 20 feet (6 m), possible resources total approximately 2 million tons (2 million tonnes).

SELECTED SAND GRAVEL RESOURCE AREA 6

Selected Sand and Gravel Resource Area 6, an ice-contact stratified drift deposit, is located approximately 4 miles (6 km) west of Rannoch, on the railway line. It has been used as a commercial source for crushed products and two abandoned pits are found on the railway right-of-way. The variability of the material, however, requires that further, more detailed investigation be undertaken.

Area 6 has an area of 130 acres (53 ha). The area currently available for extraction is calculated to be 70 acres (28 ha). Assuming an average deposit thickness of 20 feet (6 m), possible resources total approximately 4 million tons (4 million tonnes).

SAND AND GRAVEL RESOURCES OF SECONDARY SIGNIFICANCE

Two gravel outwash deposits flanking the Thames River, to the north of St. Marys, have been selected as Sand and Gravel Resource Areas of Secondary Significance. The deposits contain three licenced pits (Pit Nos. 1,8, and 9) and several wayside pits. Face heights range from 10 to 30 feet (3 to 9 m) and contain material with up to 70 percent gravel content. Although total remaining tonnages are small, close proximity to the Town of St. Marys renders these deposits suitable for wayside pit development.

Several small and scattered gravel outwash deposits in the western portion of the township have also been selected as areas of significance. There is no current extractive activity. However, geological evidence suggests the material is suitable for local uses.

BEDROCK GEOLOGY

The township is underlain by Middle Devonian limestone of the Dundee Formation and the Detroit River Group. The units occur in subcrop as part of a band 30 to 50 miles (48 to 80 km) wide, extending northwest from Port Dover on Lake Erie, through Blanshard Township, to Kincardine on Lake Huron (Sanford 1969). The bedrock surface dips gently to the southwest.

The Detroit River Group, in the southeast corner of the township, occurs in the St. Marys quarry where 21 feet (6 m) of section are exposed below the Dundee Formation (Hewitt 1960, p.141). Here, the Detroit River Group consists of brown, fine-grained to aphanitic limestone with interfingered layers of fine-grained dolomitic limestone. The upper 10 feet (3 m) of the Detroit River limestone is utilized for cement production at St. Marys. Dolomite content in this section is not high enough to reduce the chemical purity of the rocks. Low abrasion resistance and high absorption characterizes the Detroit River stone making it unsuitable for aggregate production. The Detroit River Group is generally covered by more than 50 feet (15 m) of drift.

The Dundee Formation is the youngest unit and underlies all of the township, with the exception of a small area east of St. Marys. In the western half of the township, the bedrock surface is overlain by 50 to 150 feet (15 to 46 m) of drift, except for restricted areas of thinner drift along the valley of Fish Creek. Drift cover is considerably thinner along the valleys of the Thames River, Flat Creek, Trout Creek, in the vicinity of St. Marys, and just east of Science Hill. More than 50 feet (15m) of the Dundee Formation is exposed in the St. Marys Cement Company Quarry (Q 1). The formation consists of brownish grey, medium - to fine-crystalline, fossilferous limestone with some shaly partings.

SELECTED BEDROCK RESOURCES

The St. Marys area has for many years been a major cement producing centre, utilizing the high calcium limestone of the Dundee Formation. Several quarries have been operated at various times, on the southwest fringes of St. Marys. Only one, owned by the St. Marys Cement Company, is presently operating. The Dundee is extracted in this quarry for the production of Portland Cement. The consistently high level of chemical purity also makes the Dundee limestone suitable for production of a variety of chemical products, including lime and metallurgical flux stone. Low resistance to abrasion and high absorption make the Dundee generally unacceptable for use as crushed stone

for road-building or concrete aggregate (although it has been extracted for these uses at Amherstburg and elsewhere (Hewitt 1960, p.165)).

The St. Marys Cement Company quarry is a licenced operation under The Pits and Quarries Control Act, 1971. Reserves of material suitable for chemical products are extremely large in these areas. In the licenced area north of the river, bedrock is directly overlain by 20 to 30 feet (6 to 9 m) of outwash gravel suitable for a variety of road-building and construction uses. Total reserves of this material within the licenced area are considerable.

One area has been selected for resource protection. It is contiguous with presently licenced areas and also has significant resources of sand and gravel as well as bedrock.

SELECTED BEDROCK RESOURCE AREA 1

Selected Bedrock Resource Area 1 extends west of the St. Marys' property, north of the river. Although it lies outside the area of shallow overburden, the drift is composed of good-quality outwash gravel and sand. Two licenced sand and gravel pits existing within the area, permit sequential extraction; first for unconsolidated aggregate, followed by bedrock extraction. Localization of these two operations would simplify development planning.

The Selected Area composes 240 acres (97 ha). Deletions for cultural setback requirements reduce the area currently available for extraction to 220 acres (89 ha). There has been no previous extraction of bedrock in the area. Assuming a workable thickness of 60 feet (18 m), possible resources are calculated to be approximately 48 million tons (44 million tonnes).

SUMMARY

Sand and gravel resources in Blanshard Township are sufficient to supply local demand for the near future. Nevertheless, care should be taken to preserve this material for extraction because of the generally low resources throughout the region.

The Dundee Formation and the upper few feet (metres) of the Detroit River Group are suitable for cement manufacture. Large resource tonnages are available in a Selected Bedrock Resource Area, near St. Marys. The bedrock is not generally suitable for construction or road-building aggregate.

Enquiries regarding the Aggregate Resources Inventory of Blanshard Township should be directed to the Ontario Ministry of Natural Resources at the Wingham District Office, Box 490, Highway 45, Wingham, Ontario, N0G 2W0 (tel. (519) 357-3131) or at the Southwestern Region Office, 1106 Dearness Drive, London, Ontario, N6E 1N9 (tel. (519)681-5350).

TABLE 1 | TOTAL SAND AND GRAVEL RESOURCES, BLANSHARD TOWNSHIP*

1 CLASS NO.	2 DEPOSIT TYPE (See Appendix C)	3 AREAL EXTENT Acres (Hectares)	4 ORIGINAL TONNAGE Millions of Tons (Tonnes)
1	G-IC	130 (53)	7 (6)
	G-OW	450 (182)	23 (21)
2	G-E	100 (40)	4 (4)
	G-IC	110 (44)	4 (4)
	G-OW	1220 (494)	46 (42)
3	G-E	30 (12)	1 (1)
	G-IC	60 (24)	2 (2)
	G-OW	220 (89)	6 (5)
	S-OW	40 (16)	1 (1)
4	S-IC	590 (239)	6 (5)
		2950 (1190)	100 (91)

* Identified deposit areas within the Town of St. Marys are omitted on all tables.

N.B. Minor variations in above table are due to rounding of data.

TABLE 2 | SAND AND GRAVEL PITS, BLANSHARD TOWNSHIP

1	2	3	4	5	6	7	8
NO.	MTC NO.	OWNER/OPERATOR	LOT	CON.	LICENCED AREAS Acres (Hectares)	FACE HEIGHT Feet (Metres)	% GRAVEL
LICENCED PITS							
1	–	E. Toews	6	14	45 (18)	17 (5)	
2	–	J. Pickel	30,31	T.R.	75 (30)	20 (6)	
3	–	Walloy Ex. Ltd.	26	W.NR.2	107 (43)		
4	–	C. Ross	7	4	85 (34)		
5	–	C. Ross	10	W. Bdy	51.5 (21)		
6	–	W.B. Cade	32	T.R.	17 (7)		
7	–	Yundt Bros. Const	30	S. Bdy	118 (48)	40-75 (12-23)	30
8	–	W.E. Hanley	5	14	47 (19)	10 (3)	50
9	–	D.R. Nairn	13	15	19 (8)		
10	–	S.L. Bickell	8,9	3	30.2 (12)		
11	–	C. Ross	17, 18	11	50 (20)		
12	–	Corp. of The Town of St. Marys		St. Marys	6.4 (3)		
13	–	Walloy Exc. Ltd.	25	E.M.R.	30 (12)		
14	–	Corp. Of The Twp. of Blanshard	24	11	13.3 (5)		
					694.4 (281.0)		

TABLE 2 | SAND AND GRAVEL PITS, BLANSHARD TOWNSHIP

1 NO.	2 MTC NO.	3 OWNER/OPERATOR	4 LOT	5 CON.	6 LICENCED AREAS Acres (Hectares)	7 FACE HEIGHT Feet (Metres)	8 % GRAVEL
UNLICENCED PITS							
15	S8-147	Hooper Bros.	13	15			
16	S8-152	G. Smith	12	15			
17	S8-22	Ross & Patton	3	5		10-15 (3-5)	55-75
18	L7-144	Walloy No.2	26	NRC		10-15 (3-5)	50-75
19	S8-153	D. Nairn	18	15			
20	S8-66	Armstrong	7	14		6-10 (2-3)	60-65
21	S8-149	E. Robinson	10	2			
22	L7-123	Yundt & McCann	16	16			
23	L7-148	St. Marys Cement Company	25	T.R.			80
24	L7-35	J. Dykes	26	NRC		10-20 (3-6)	20-55
25	L7-88	J. Mossey	26	NRC			
26	L7-101	H. Chittick	22	10			
27	L7-146	St. Marys Cement Company	25	T.R.			
28	L7-154	P. Weber	15	11			
29	L7-154	Youngson	13	9			
30	S8-26	Pattison	7	8			
31	S8-33	Robinson	5	14		15-30 (5-9)	0
32	S8-24	Switzer	3	5		10 (3)	35-60
33	S8-85	Brine	18	1			
34	S8-86	Dept. Trans. Ont.	11	5			
35	S8-137	J.E. Robinson	10	3			
36	S8-127	M. Armstrong	8	NRC		10 (3)	
37	S8-134	J.E. Robinson	11	2			

TABLE 3 | SELECTED SAND AND GRAVEL RESOURCE AREAS, BLANSHARD TOWNSHIP

1	2	3	4	5	6	7
DEPOSIT NO.	**UNLICENCED AREA** Acres (Hectares)	**CULTURAL SETBACKS** Acres (Hectares)	**EXTRACTED AREA** Acres (Hectares)	**AVAILABLE AREA** Acres (Hectares)	**ESTIMATED DEPOSIT THICKNESS** Feet (Metres)	**AVAILABLE AGGREGATE** Millions of Tons (Tonnes)
1	210 (85)	10 (4)	30 (12)	170 (69)	25 (8)	11 (10)
2	170 (69)	50 (20)	50 (20)	70 (28)	15 (5)	3 (3)
3	140 (57)	0 (0)	0 (0)	140 (57)	15 (5)	4 (4)
4	140 (57)	30 (12)	0 (0)	110 (44)	15 (5)	4 (4)
5	80 (30)	10 (4)	30 (12)	40 (16)	20 (6)	2 (2)
6	130 (53)	40 (16)	20 (8)	70 (28)	20 (6)	4 (4)
	870 (350)	140 (57)	130 (53)	600 (243)		28 (25)

N.B. Minor variations in above table are due to rounding of data.

TABLE 4 | TOTAL IDENTIFIED BEDROCK RESOURCES, BLANSHARD TOWNSHIP

1 DRIFT THICKNESS Feet (Metres)	2 FORMATION	3 WORKABLE THICKNESS Feet (Metres)	4 AREAL EXTENT Acres (Hectares)	6 ORIGINAL TONNAGE Millions of Tons (Tonnes)
0-3 (0-1)	Dundee	60 (18)	40 (16)	9 (8)
3-25 (1-8)	Dundee	60 (18)	280 (113)	60 (55)
25-50 (8-15)	Dundee	60 (18)	1300 (530)	281 (255)
			1620 (660)	350 (320)
0-25 (0-8)	Detroit River Group	60 (18)	20 (8)	4 (4)
25-50 (8-15)	Detroit River Group	60 (18)	60 (24)	12 (11)
			80 (32)	16 (14)
			1700 (690)	365 (330)

N.B. Minor variations in above table are due to rounding of data.

TABLE 5 QUARRIES, BLANSHARD TOWNSHIP

1 NO.	2 MTC NO.	3 OWNER/OPERATOR	4 LOT	5 CON.	6 LICENCED AREA Acres (Hectares)	7 FACE HEIGHT Feet (Metres)
1		St. Marys Cement Co. Ltd.	St. Marys		1088 (440)	62 (19)

TABLE 6 | SELECTED BEDROCK RESOURCE AREAS, BLANSHARD TOWNSHIP

1	2	3	4	5	6	7	8
DEPOSIT NO.	**DEPTH OF OVERBURDEN** Feet (Metres)	**UNLICENCED AREA** Acres (Hectares)	**CULTURAL SETBACKS** Acres (Hectares)	**EXTRACTED AREA** Acres (Hectares)	**AVAILABLE AREA** Acres (Hectares)	**ESTIMATED WORKABLE THICKNESS** Feet (Metres)	**AVAILABLE TONNAGE** Millions of Tons (Tonnes)
1	(>50 (>15)	240 (97)	20 (8)	0 (0)	220 (89)	60 (18)	48 (44)

N.B. Minor variations in above table are due to rounding of data.

REFERENCES

Association of Professional Engineers of Ontario
1976: Performance Standards for Professional Engineers Advising on and Reporting on Oil, Gas and Mineral Properties; Association of Professional Engineers of Ontario, 11 p.

Deike, W. F.
1972: Inventory of Granular Sources, Perth County; Operations Branch, Ontario Ministry of Transportation and Communications, 11 p., unpublished report.

Hewitt, D. F.
1960: The Limestone Industries of Ontario; Ontario Department of Mines, Industrial Mineral Report 5, 174 p.

1972: The Paleozoic Geology of Southern Ontario; Ontario Division of Mines, Geological Report 105, 18 p. Accompanied by Map 2254, scale 1:1 013 760.

Karrow, P. F.
1965: Bedrock Topography of the Lucan Area, Southern Ontario; Ontario Department of Mines, Bedrock Topography Series, Preliminary Map P.291, scale 1:50 000.

1977: Quaternary Geology of the St. Marys Area, Southern Ontario; Ontario Division of Mines, Geoscience Report 148, 55 p. Accompanied by Map 2366, scale 1:50 000.

Karrow, P. F. and Ferguson, A. J.
1974: (Rev.) Bedrock Topography of the St. Marys Area, Southern Ontario; Ontario Department of Mines, Bedrock Topography Series, Preliminary Map P.266, scale 1:50 000.

Ontario
1979: The Pits and Quarries Control Act, 1971; Statutes of Ontario, 1971, Chapter 96, Queen's Printer for Ontario.

Ontario Interministerial Committee on National Standards and Specifications (Metric Committee)
1975: Metric Practice Guide; 67p.

Ontario Ministry of Intergovernmental Affairs
1979: Municipal Directory 1979; Queen's Printer for Ontario, 190 p.

Ontario Ministry of Natural Resources
1977: Ontario Mineral Review 1976-1977; Ontario Ministry of Natural Resources, 95p.

Ontario Ministry of Treasury, Economics and Intergovernmental Affairs
1974: Municipal Directory 1974; Queen's Printer for Ontario, 128p.

1977: Municipal Directory 1977-78; Queen's Printer for Ontario, 177p.

Robertson, J. A.
1975: Mineral Deposit Studies, Mineral Potential Evaluation and Regional Planning in Ontario; Ontario Division of Mines, Miscellaneous Paper 61, 42p.

Sado, E. V. and Vagners, U. J.
1975: Quaternary Geology of the Lucan Area, Southern Ontario; Ontario Division of Mines, Geological Series, Preliminary Map P.1048, scale 1:50 000.

Sanford, B. V.
1969: Geology of the Toronto-Windsor Area, Ontario; Geological Survey of Canada, Map 1263A, scale 1:250 000.

APPENDIX A-SUGGESTED ADDITIONAL READING

American Geological Institute
1972: Glossary of Geology; Washington, D.C., 858 p.

Bauer, A. M.
1970: A Guide to Site Development and Rehabilitation of Pits and Quarries; Ontario Department of Mines and Northern Affairs, Industrial Mineral Report 33, 62p.

Cowan, W. R.
1977: Towards the Inventory of Ontario's Mineral Aggregates; Ontario Geological Survey, Miscellaneous Paper 73, 19p.

Fairbridge, R.W. (ed.)
1968: The Encyclopedia of Geomorphology; Encyclopedia of Earth Sciences, Vol. III, Reinhold Book Corp., N.Y., 1295p.

Flint, R.F.
1971: Glacial and Quaternary Geology; John Wiley and Sons Inc., 892p.

Guillet, G.R.
1967: The Clay Products Industry of Ontario; Ontario Department of Mines, Industrial Mineral Report 22, 206p.

Hewitt, D.F.
1960: The Limestone Industries of Ontario; Ontario Department of Mines, Industrial Mineral Report 5, 177p.
1964a: Building Stones of Ontario, Part I Introduction; Ontario Department of Mines, Industrial Mineral Report 14, 43p
1964b: Building Stones of Ontario, Part II Limestone; Ontario Department of Mines, Industrial Mineral Report 15. 41p
1964c: Building Stones of Ontario, Part III Marble; Ontario Department of Mines, Industrial Mineral Report 16, 89p.
1964d: Building Stones of Ontario, Part IV Sandstone; Ontario Department of Mines, Industrial Mineral Report 17, 57p
1972: Paleozoic Geology of Southern Ontario; Ontario Division of Mines, Geological Report 105, 18p.

Hewitt, D. F. and Karrow, P. F.
1963: Sand and Gravel in Southern Ontario; Ontario Department of Mines, Industrial Mineral Report 11, 151p.

Hewitt, D. F. and Vos, M. A.
1970: Urbanization and Rehabilitation of Pits and Quarries; Ontario Department of Mines, Industrial Mineral Report 34, 21p.

Ontario Mineral Aggregate Working Party
1977: A Policy for Mineral Aggregate Resource Management in Ontario; Ontario Ministry of Natural Resources, 232p.

Ontario Ministry of Natural Resources
1975: Vegetation for the Rehabilitation of Pits and Quarries; Forest Management Branch, Division of Forests, 38p.

Proctor and Redfern Ltd.
1974: Mineral Aggregate Study, Central Ontario Planning Region; Prepared for the Ontario Ministry of Natural Resources, over 100p., some coloured maps.

Proctor and Redfern Ltd., and Gartner Lee Associates Ltd.
1975: Mineral Aggregate Study of Part of The Eastern Ontario Region; Prepared for the Ontario Ministry of Natural Resources, about 200p.

1977: Mineral Aggregate Study and Geological Inventory, Southwestern Region of Ontario; Prepared for the Ontario Ministry of Natural Resources, about 200 p., some coloured maps.

APPENDIX B-GLOSSARY

ABRASION RESISTANCE

Tests such as the Los Angeles Abrasion Test are used to measure the ability of aggregate to resist crushing and pulverizing under conditions similar to those encountered in processing and use. Measuring resistance is an important component in the evaluation of the quality and prospective uses of aggregate. Hard, durable material is preferred for road building.

ABSORPTION CAPACITY

Related to the porosity of the rock types of which an aggregate is composed. Porous rocks are subject to disintegration when absorbed liquids freeze and thaw, thus decreasing the strength of the aggregate.

AGGREGATE

Any hard, inert, construction material (sand, gravel, shells, slag, crushed stone or other mineral material) used for mixing in various sized fragments with a cement or bituminous material to form concrete, mortar, etc., or used alone for road building or other construction. Synonyms include mineral aggregate and granular material.

CAMBRIAN

The first Period of the Paleozoic Era, thought to have covered the time between 570 and 500 million years ago; the Cambrian precedes the Ordovician Period.

CLAST

An individual constituent, grain, or fragment of a sediment or rock, produced by the mechanical weathering of a larger rock mass. Synonyms include particle and fragment.

DELETERIOUS LITHOLOGY

A general term used to designate those rock types which are chemically or physically unsuited for use as construction or road-building aggregates. Such lithologies as chert, shale, siltstone, and sandstone may deteriorate rapidly when exposed to traffic and other environmental conditions.

DEVONIAN

A Period of the geological past thought to have covered the span of time between 395 and 345 million years ago, following the Silurian Period. Rocks formed in the Devonian Period are among the youngest found in Ontario.

DIRT

See fines.

DOLOSTONE

A carbonate sedimentary rock consisting chiefly of the mineral dolomite and containing relatively little calcite (dolostone is also known as dolomite).

DRIFT

A general term for all unconsolidated rock debris transported from one place and deposited in another; distinguished from underlying bedrock. In North America, glacial activity has been the dominant mode of transport and deposition of drift. Synonyms include overburden and surficial deposit.

DRUMLIN

A low, smoothly rounded, elongated hill, mound, or ridge composed of glacial materials. These landforms were deposited beneath an advancing ice sheet, and were shaped by its flow.

EOLIAN

Pertaining to the wind, especially with respect to landforms whose constituents were transported and deposited by wind activity. Sand dunes are an example of an eolian landform.

FINES

A general term used to describe the size fraction of an aggregate which passes (is finer than) the No.200 mesh screen (0.074 mm). Also described informally as "dirt", these particles are in the silt- and clay-size range.

GLACIAL LOBE

A tongue-like projection from the margin of the main mass of an ice cap or ice sheet. During the Pleistocene Epoch several lobes of the Laurentide continental ice sheet occupied the Great Lakes basins. These lobes advanced and retreated numerous times during the Pleistocene, producing the complex arrangement of glacial material and landforms found in southern Ontario.

GRADATION

The proportion of material of each particle size, or the frequency distribution of the various sizes which constitute a sediment. The strength, durability, permeability and stability of an aggregate depend to a great extent on its gradation. The size limits for different particles are as follows:

Boulder		>-256 mm
Gravel	cobble	64-256 mm
Gravel	pebble	4-64 mm
Gravel	granule	2-4 mm
Sand	coarse	.5-2 mm
	medium	.25-.5 mm
	fine	.074-.25 mm
Silt, clay		<.074 mm

GRANULAR BASE COURSE

Components of the pavement structure of a road, which are placed on the subgrade and are designed to provide strength, stability, and drainage, as well as support for surfacing materials. Several types have been defined: Granular Base Course A consists of crushed and processed aggregate and has relatively stringent quality standards in comparison to Granular Base Course B and C which are usually pit-run or other unprocessed aggregate.

H.L. (HOT-LAID OR ASPHALTIC AGGREGATE)

Bituminous, cemented aggregates used in the construction of pavements either as surface or bearing course (H.L. 1, 3, and 4), or as binder course (H.L. 2, 6, and 8) used to bind the surface course to the underlying granular base course.

LITHOLOGY

The description of rocks on the basis of such characteristics as color, structure, mineralogic composition, and grain size. Generally, the description of the physical character of a rock.

MELTWATER CHANNEL

A drainage way, usually terraced, produced by water flowing away from a melting glacier margin.

ORDOVICIAN

An early period of the Paleozoic Era thought to have covered the span of time between 500 and 435 million years ago.

PALEOZOIC ERA

One of the major divisions of the geologic time scale thought to have covered the time between 570 and 230 million years ago. The Paleozoic Era (or Ancient Life Era) is subdivided into six geologic Periods, of which only four (Cambrian, Ordovician, Silurian, and Devonian) can be recognized in southern Ontario.

PLEISTOCENE

An Epoch of the recent geological past including the time from approximately 1.8 million years ago to 7000 years ago. Much of the Pleistocene was characterized by extensive glacial activity.

POSSIBLE RESOURCE

Reserves estimates based largely on broad knowledge of the geologic character of the deposit and for which there are few, if any samples or measurements. The estimates are based on assumed continuity or repetition for which there are reasonable geological indications.

SHALE

A fine-grained, sedimentary rock formed by the consolidation of clay, silt, or mud and characterized by well developed bedding planes, along which the rock breaks readily into thin layers. The term shale is also commonly used for fissile claystone, siltstone, and mudstone.

SILURAIN

An early Period of the Paleozoic Era thought to have covered the time between 435 and 395 million years ago. The Silurian follows the Ordovician Period and precedes the Devonian Period.

SOUNDNESS

The ability of the components of an aggregate to withstand the effects of various weathering processes and agents. Unsound lithologies are subject to disintegration caused by the expansion of absorbed solutions. This may seriously impair the performance of road-building and construction aggregates.

TILL

Unsorted and unstratified rock debris, deposited directly by glaciers, and ranging in size from clay to large boulders.

WISCONSINAN

Pertaining to the last glacial stage of the Pleistocene Epoch in North America. It began approximately 85,000 years ago and ended approximately 7000 years ago. The glacial deposits and landforms of southern Ontario are predominantly the result of glacial activity during the Wisconsinan Stage.

APPENDIX C-GEOLOGY OF SAND AND GRAVEL DEPOSITS

The type, distribution, and extent of sand and gravel deposits in southern Ontario are the result of extensive glacial and glacially influenced activity in Wisconsinan time during the Pleistocene Epoch, approximately 7000 to 85 000 years ago. The deposit types reflect the different depositional environments that existed during the melting and retreat of the continental ice masses, and they can readily be differentiated on the basis of their morphology, structure, and texture. The deposit types are described below.

GLACIOFLUVIAL DEPOSITS

These deposits can be divided into two broad categories: those that were formed in contact with (or in close proximity to) glacial ice, and those that were deposited by meltwaters carrying materials beyond the ice margin.

ICE-CONTACT TERRACES (ICT)

These are glaciofluvial features deposited between the glacial margin and a confining topographic high, such as the side of a valley, The structure of the deposits may be similar to that of outwash deposits, but in most cases the sorting and grading of the material is more variable and the bedding is discontinuous due to extensive slumping. The probability of locating large amounts of crushable aggregate is moderate, and extraction may be expensive due to the variability of the deposits both in terms of quality and grain-size distribution.

KAMES (K)

Kames are defined as mounds of poorly sorted sand and gravel deposited by meltwater in depressions or fissures on the ice surface or at its margin. During glacial retreat, the melting of supporting ice causes collapse of the deposits producing internal structures characterized by bedding discontinuities. The deposits consist mainly of irregularly bedded and cross-bedded, poorly sorted sand and gravel. The present forms of the deposits include single mounds, linear ridges (crevasse fillings) or complex groups of landforms. The latter are occasionally described as "undifferentiated ice-contact stratified drift" (IC) when detailed subsurface information is unavailable. Since kames commonly contain large amounts of fine-grained material and are characterized by considerable variability, there is generally a low to moderate probability of discovering large amounts of good-quality, crushable aggregate. Extractive problems encountered in these deposits are mainly the excessive variability of the aggregate and the rare presence of excess fines (silt-and clay-sized particles).

ESKERS (E)

Eskers are narrow, sinuous ridges of sand and gravel deposited by meltwaters flowing in tunnels within or at the base of glaciers, or in channels on the ice surface. They vary greatly in size. Many, though not all eskers consist of a central core of poorly sorted and stratified gravel characterized by a wide range in grain size. The core material is often draped on its flanks by better sorted and stratified sand and gravel. The deposits have a high probability of containing a large proportion of crushable aggregate, and since they are generally built above the surrounding ground surface, are convenient extraction sites. For these reasons esker deposits have been traditional aggregate sources throughout southern Ontario, and are significant components of the total resources of many areas.

Some planning constraints and opportunities are inherent in the nature of the deposits. Because of their linear nature, the deposits commonly extend across several property boundaries leading to unorganized extractive development at numerous small pits. On the other hand, because of their form, eskers can be easily and inexpensively extracted and are amenable to rehabilitation and sequential land use.

UNDIFFERENTIATED ICE-CONTACT STRATIFIED DRIFT (IC)

This designation may include deposits from several ice-contact, depositional environments which usually form extensive, complex landforms. It is not feasible to identify individual areas of coarse-grained material within such deposits due to their lack of continuity and grain-size variability. They are given a qualitative

rating based on existing pit and other subsurface data.

OUTWASH (OW)

Outwash deposits consist of sand and gravel laid down by meltwaters beyond the margin of the ice lobes. They occur as sheets or as terraced valley fills (valley trains) and may be very large in extent and thickness. Well developed outwash deposits have good horizontal bedding and are uniform in grain-size distribution. Outwash deposited near the glacier's margin is much more variable in texture and structure. The probability of locating useful crushable aggregates in outwash deposits is moderate to high depending on how much information on size, distribution and thickness is available.

ALLUVIUM (AL)

Alluvium is a general term for clay, silt, sand, gravel, or similar unconsolidated material deposited during postglacial time by a stream as sorted or semi-sorted sediment, on its bed or on its floodplain. The probability of locating large amounts of crushable aggregate in alluvial deposits is low, and it has generally low value due to the presence of excess silt- and clay-sized material. There are no large postglacial alluvium deposits in Ontario.

GLACIOLACUSTRINE DEPOSITS

GLACIOLACUSTRINE BEACH DEPOSITS (LB)

These are relatively narrow, linear features formed by wave action at the shores of glacial lakes that existed at various times during the deglaciation of southern Ontario. Well developed lacustrine beaches are usually less than 20 feet (6 m) thick. The aggregate is well sorted and stratified and sand-sized material commonly predominates. The composition and size distribution of the deposit depends on the nature of the underlying material. The probability of obtaining crushable aggregate is high when the material is developed from coarse-grained materials such as a stony till, and low when developed from fine-grained materials. Beaches are relatively narrow, linear deposits, so that extractive operations are often numerous and extensive.

GLACIOLACUSTRINE DELTAS (LD)

These features were formed where streams or rivers of glacial meltwater flowed into lakes and deposited their suspended sediment. In southern Ontario such deposits tend to consist mainly of sand and abundant silt. However, in near-ice and ice-contact positions, coarse material may be present. Although deltaic deposits may be large, the probability of obtaining coarse material is generally low.

GLACIOLACUSTRINE PLAIN (LP)

The nearly level surface marking the floor of an extinct glacial lake. The sediments which form the plain are predominantly fine to medium sand, silt, and clay, and were deposited in relatively deep water. Lacustrine deposits are generally of low value as aggregate sources due to their fine grain size and lack of crushable material. In some aggregate-poor areas, lacustrine deposits may constitute valuable sources of fill and some granular base course aggregate.

GLACIAL DEPOSITS

END MORAINES (EM)

These are belts of glacial drift deposited at, and parallel to, glacier margins. They commonly consist of ice-contact stratified drift and in such instances are usually called kame moraines. Kame moraines commonly result from deposition between two glacial lobes (interlobate moraines). The probability of locating aggregates within such features is moderate to low. Exploration and development costs are high. Moraines may be very large and contain vast aggregate resources, but the location of the best resource areas within the moraine is usually poorly defined.

EOLIAN DEPOSITS

WINDBLOWN FORMS (WD)

Windblown deposits are those formed by the transport and deposition of sand by winds. The form of the deposits ranges from extensive, thin layers to well developed linear and crescentic ridges known as dunes. Most windblown deposits in southern Ontario are derived from,

and deposited on , pre-existing lacustrine sand plain deposits. Windblown sediments are almost invariably composed of fine to coarse sand and are usually well sorted. The probability of locating crushable aggregate in windblown deposits is very low.

APPENDIX D-GEOLOGY OF BEDROCK DEPOSITS

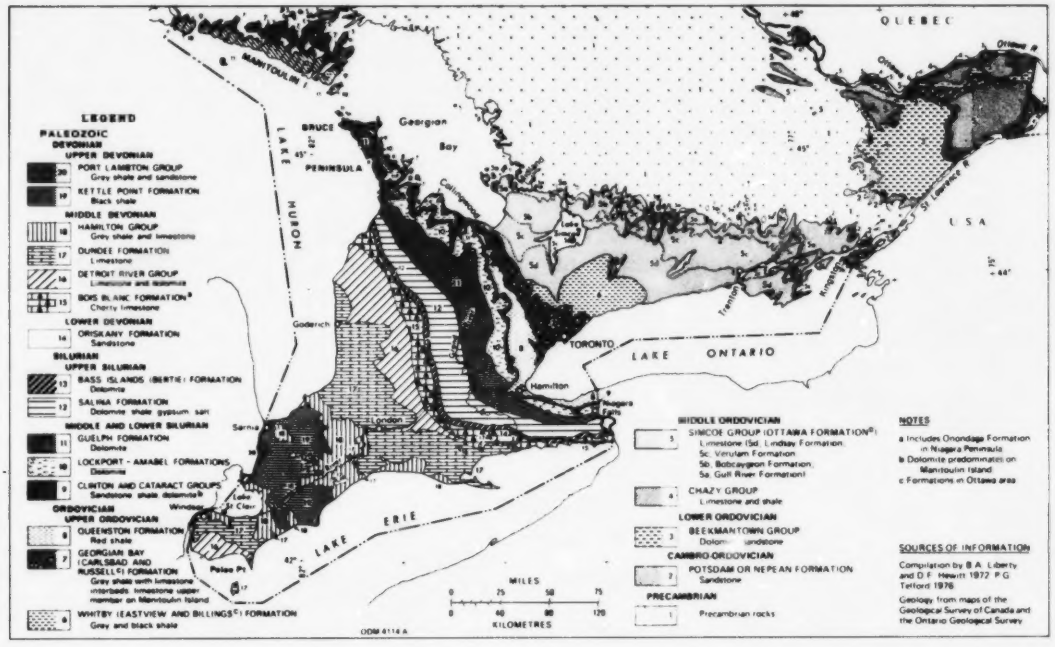

Figure 2 - Bedrock Geology of Southern Ontario

BEDROCK SUITABLE FOR CRUSHED STONE PRODUCTS

BASS ISLANDS FORMATION (UPPER SILURIAN)

(Includes the Bertie Formation of the Niagara Peninsula) Composition: Medium- to massive-bedded, aphanitic, brown dolostone with shaly partings. Thickness: 35 to 60 feet (11-18m) near Hagersville. Uses: Quarried for crushed stone on the Niagara Peninsula at Fort Erie, Cayuga, Hagersville, and Dunville. Los Angeles Abrasion Test: 17-35% loss; Absorption: 1.4%. Shaly parts are unsuitable for aggregate due to high soundness losses.

BOBCAYGEON FORMATION (MIDDLE ORDOVICIAN)

Composition: Compact, homogeneous, medium- to thin-bedded, fine-grained limestone with some argillaceous and shaly partings. Thickness: The lower unit is 40 to 72 feet (12 to 22 m) thick in the east and the remainder of the formation is 40 feet (12 m). Uses: Quarried at Kirkfield and Marysville for crushed stone. The Bobcaygeon Formation has consistently acceptable quality for granular base course materials and concrete.

BOIS BLANC FORMATION (LOWER-MIDDLE DEVONIAN)

Composition: Brownish grey, medium-crystalline, medium- to thin-bedded, cherty limestone, commonly fossiliferous. Limestone may be silty or sandy in places. Thickness: 9 to 200 feet (3 to 61 m). Uses: Quarried at Hagersville, Cayuga, and Port Colborne for crushed stone. High chert content makes much of the material unsuitable for concrete aggregate. Los Angeles Abrasion

Test: 14-28% loss; Soundness Test: 4-10% loss; Absorption: 0.7-2.0%.

DUNDEE FORMATION (MIDDLE DEVONIAN)

Composition: Fine- to medium-crystalline, brown ish grey, medium- to thick-bedded, dolomitic limestone with shaly partings, sandy layers, and chert in some areas. Thickness: 60 to 160 feet (18 to 49 m). Uses: Quarried near Port Dover and Pelee Island for crushed stone. Used at St. Marys for portland cement. Los Angeles Abrasion Test: 22-32% loss; Absorption: 0-4%.

GULL RIVER FORMATION (MIDDLE ORDOVICIAN)

Composition: Member A: thin-to thick-bedded, interbedded, grey argillaceous limestone and buff to green dolostone with a maximum thickness of 60 feet (18 m). Members B and C are dense, aphanitic limestones with argillaceous dolostone interbeds. Uses: Quarried at Kirkfield, Victoria County, and Uthoff for crushed stone. The product is generally fresh and compact with good cubic-shaped factor, low clay content, low absorption, and low soundness losses. Smooth particle surfaces may cause adhesion problems for asphalt. There is some alkali reactivity in a few of the layers.

LOCKPORT AND AMABEL FORMATIONS (MIDDLE SILURIAN)

Composition: Amabel Formation (Georgetown to the Bruce Peninsula): massive, fine crystalline dolostone, with reef facies dolostone near Georgetown. Lockport Formation (lateral facies equivalent to the Amabel Formation from Georgetown to Niagara Falls): thin- to massive-bedded, fine- to medium-grained dolostone. Thickness: Amabel Formation: maximum observed thickness of 84 feet (26 m). Lockport Formation: up to 130 feet (40 m). Uses: The Lockport and Amabel Formations have been used to produce lime, crushed stone, and building stone throughout their area of occurrence, and are a valuable aggregate resource. Los Angeles Abrasion Test: 21-35% loss; Soundness Test: 2.0% loss; Absorption: 0.4-1.6%.

ONONDAGA FORMATION (MIDDLE DEVONIAN)

(Equivalent to the Detroit River Group, with a textural change) Composition: Edgecliffe Member: medium-bedded, fine- to medium-grained, dark grey cherty limestone with an estimated thickness of 25 to 30 feet (8 to 9 m). Clarence Member: massive-bedded, dark grey brown, fine-grained, very cherty limestone having an estimated thickness of 26 feet (8 m). Moorehouse Member: medium-bedded, dark grey brown or purplish brown, fine- to coarse-grained, variably cherty limestone with an estimated thickness of 15 to 25 feet (5 to 8 m). Uses: Quarried for crushed stone on the Niagara Peninsula at Welland and Port Colborne. High chert content makes much of the material unsuitable for concrete aggregate.

OTTAWA FORMATION (MIDDLE ORDOVICIAN)

Composition: Lower Phase (Lowville and Pamela Beds): shale, some sandstone and dolostone. Thickness: 100 feet (30 m). Middle Phase (Hull, Rockland, and Leray Beds): pure, thick-bedded, crystalline limestone. Thickness: 150 feet (46 m) near Ottawa. Upper Phase (Cobourg and Sherman Fall Beds): pure and impure crystalline limestone with few to numerous shaly partings, 450 to 475 feet (137-145 m) thick near Ottawa. Uses: The Leray, Rockland, and Hull Beds have been quarried extensively for crushed stone and for building stone. In addition, the Hull Beds are an excellent source of lime for cement production and agricultural uses.

OXFORD FORMATION (LOWER ORDOVICIAN)

Composition: Medium- to thick-bedded, grey dolostone, with some shaly partings. Thickness: 240 feet (73 m). Uses: Quarried for crushed stone (road and concrete aggregate) at Ottawa, Brockville, and Smiths Falls.

BEDROCK SUITABLE FOR LIME PRODUCTION AND OTHER CHEMICAL USES.

DETROIT RIVER GROUP (MIDDLE DEVONIAN)

(Equivalent to the Onondaga Formation in the Niagara Peninsula, with a textural change). Composition: Near Beachville, the group consists of medium- to micro-crystalline, medium-bedded, high purity limestone. It grades northwards near St. Marys to soft, evenly bedded, fine-grained dolostone with bituminous laminae. Massive, porous, reef facies material also occurs to the north (Formosa Reef Limestone). Thickness: 100 feet (30 m) at Beachville, 350 feet (107 m) at Clinton. Uses: The most important

source of high purity limestone in Ontario is the Lucas Formation of the Detroit River Group at Beachville. Detroit River limestone produces 80% of Ontario's cement. Its dolomitic reefal facies is also important for lime production to the north. It is generally unsuitable for crushed stone. The Anderdon Member of the Lucas Formation is quarried at Amherstburg for crushed stone.

GRENVILLE MARBLE (PRECAMBRIAN)

Composition: Recrystallized white limestone and dolostone, fine- to coarse-grained, usually of high chemical purity. Uses: Lime production, but also in small amounts for terrazo chips, poultry grit, decorative stone, and building stone.

GUELPH FORMATION (MIDDLE SILURIAN)

Composition: Aphanitic- to medium-crystalline, thick-bedded, soft, porous dolostone, characterized in places by extensive vuggy, porous reefal facies dolostone of high chemical purity. The Guelph Formation and the underlying Amabel Formation have a combined thickness of 200 feet (61 m) on the Niagara Peninsula and more than 400 feet (122 m) on the Bruce Peninsula. Uses: The main use is for dolomitic lime in the construction industry. It is quarried at Glen Christie and Guelph.

LINDSAY FORMATION (MIDDLE ORDOVICIAN)

Composition: Lower Member: fine-crystalline, rubbly, nodular, weathering limestone. Upper Member: grey calcareous claystone with shaly partings and bioclastic layers. The rock is "soft" and weathers to rubble. Both members are characterized by low dolomite content and by numerous clayey partings. Uses: Quarried at Picton, Ogden Point, Colborne, and Bowmanville for lime. It is generally unsuitable for crushed stone, concrete aggregate, or granular base course.

VERULAM FORMATION (MIDDLE ORDOVICIAN)

Composition: Fossiliferous, pure to argillaceous limestone and interbedded calcareous shale. The rock is not resistant to erosion and commonly weathers to rubble. Thickness: 200-300 feet (61-91 m). Uses: Quarried at Picton, Ogden Point, and Mara Township for lime. It is unsuitable for crushed stone due to clay impurities and many clayey interbeds, low abrasion resistance, high soundness losses and poor freeze-thaw resistance.

BEDROCK SUITABLE FOR BRICK AND TILE MANUFACTURE

GEORGIAN BAY FORMATION (UPPER ORDOVICIAN)

(Formerly known as the Meaford-Dundas and Blue Mountain shales in the Toronto and Bruce Peninsula areas). Composition: Soft, fissile, blue grey shale with limey or sandy lenses in a few places. Thickness: 640 feet (195 m) at Toronto. Uses: Five producers in Metro Toronto and Cooksville produce brick and structural tile (Guillet 1967). Lightweight aggregate is also produced at Streetsville by heat expansion of the shale.

HAMILTON GROUP (MIDDLE DEVONIAN)

Composition: Grey shale with interbeds of crystalline and cherty limestone. The Group has six formations. Only the Arkona is of commercial value. It is a soft, light grey, calcareous shale which is plastic and easily worked when wet. Thickness: 80 to 300 feet (24 to 91 m). Uses: The Arkona Formation is extracted at Thedford and near Arkona for production of drainage tile and brick.

QUEENSTON FORMATION (UPPER ORDOVICIAN)

Composition: Red, thin- to thick-bedded, sandy to argillaceous shale with green mottling and banding. Thickness: 400 to 500 feet (122 to 152 m). Uses: There are 12 large shale quarries developed in the Queenston Formation in the Toronto-Hamilton region and one at Russell, near Ottawa (Guillet 1967). All produce brick for construction. The Queenston Formation is the most important source material for brick manufacture in the Province.

BEDROCK SUITABLE FOR OTHER INDUSTRIAL PRODUCTS

NEPEAN (POTSDAM) FORMATION (CAMBRO-ORDOVICIAN)

Composition: Creamy, coarse-grained, silica sandstone. Uses: Quarried throughout its area of outcrop for building stone, decorative stone, abrasives, and for glass making.

SALINA FORMATION (UPPER SILURIAN)

Composition: Grey and red shale, brown dolomite, and, in places, salt, anhydrite, and gypsum. The formation consists predominantly of evaporite deposits with up to eight members identified. Uses: Gypsum is mined at Hagersville, Caledonia, and Drumbo. Salt is mined at Goderich and is produced from brine wells at Amhertsburg, Windsor, and Sarnia.

WHITBY FORMATION (UPPER ORDOVICIAN)

(Formerly known as Collingwood Shale near Toronto). Composition: Brown to black fissile shale. Uses: Quarried at Bowmanville for use in cement production. Testing indicates that the Whitby Formation may produce satisfactory lightweight expanded aggretage.

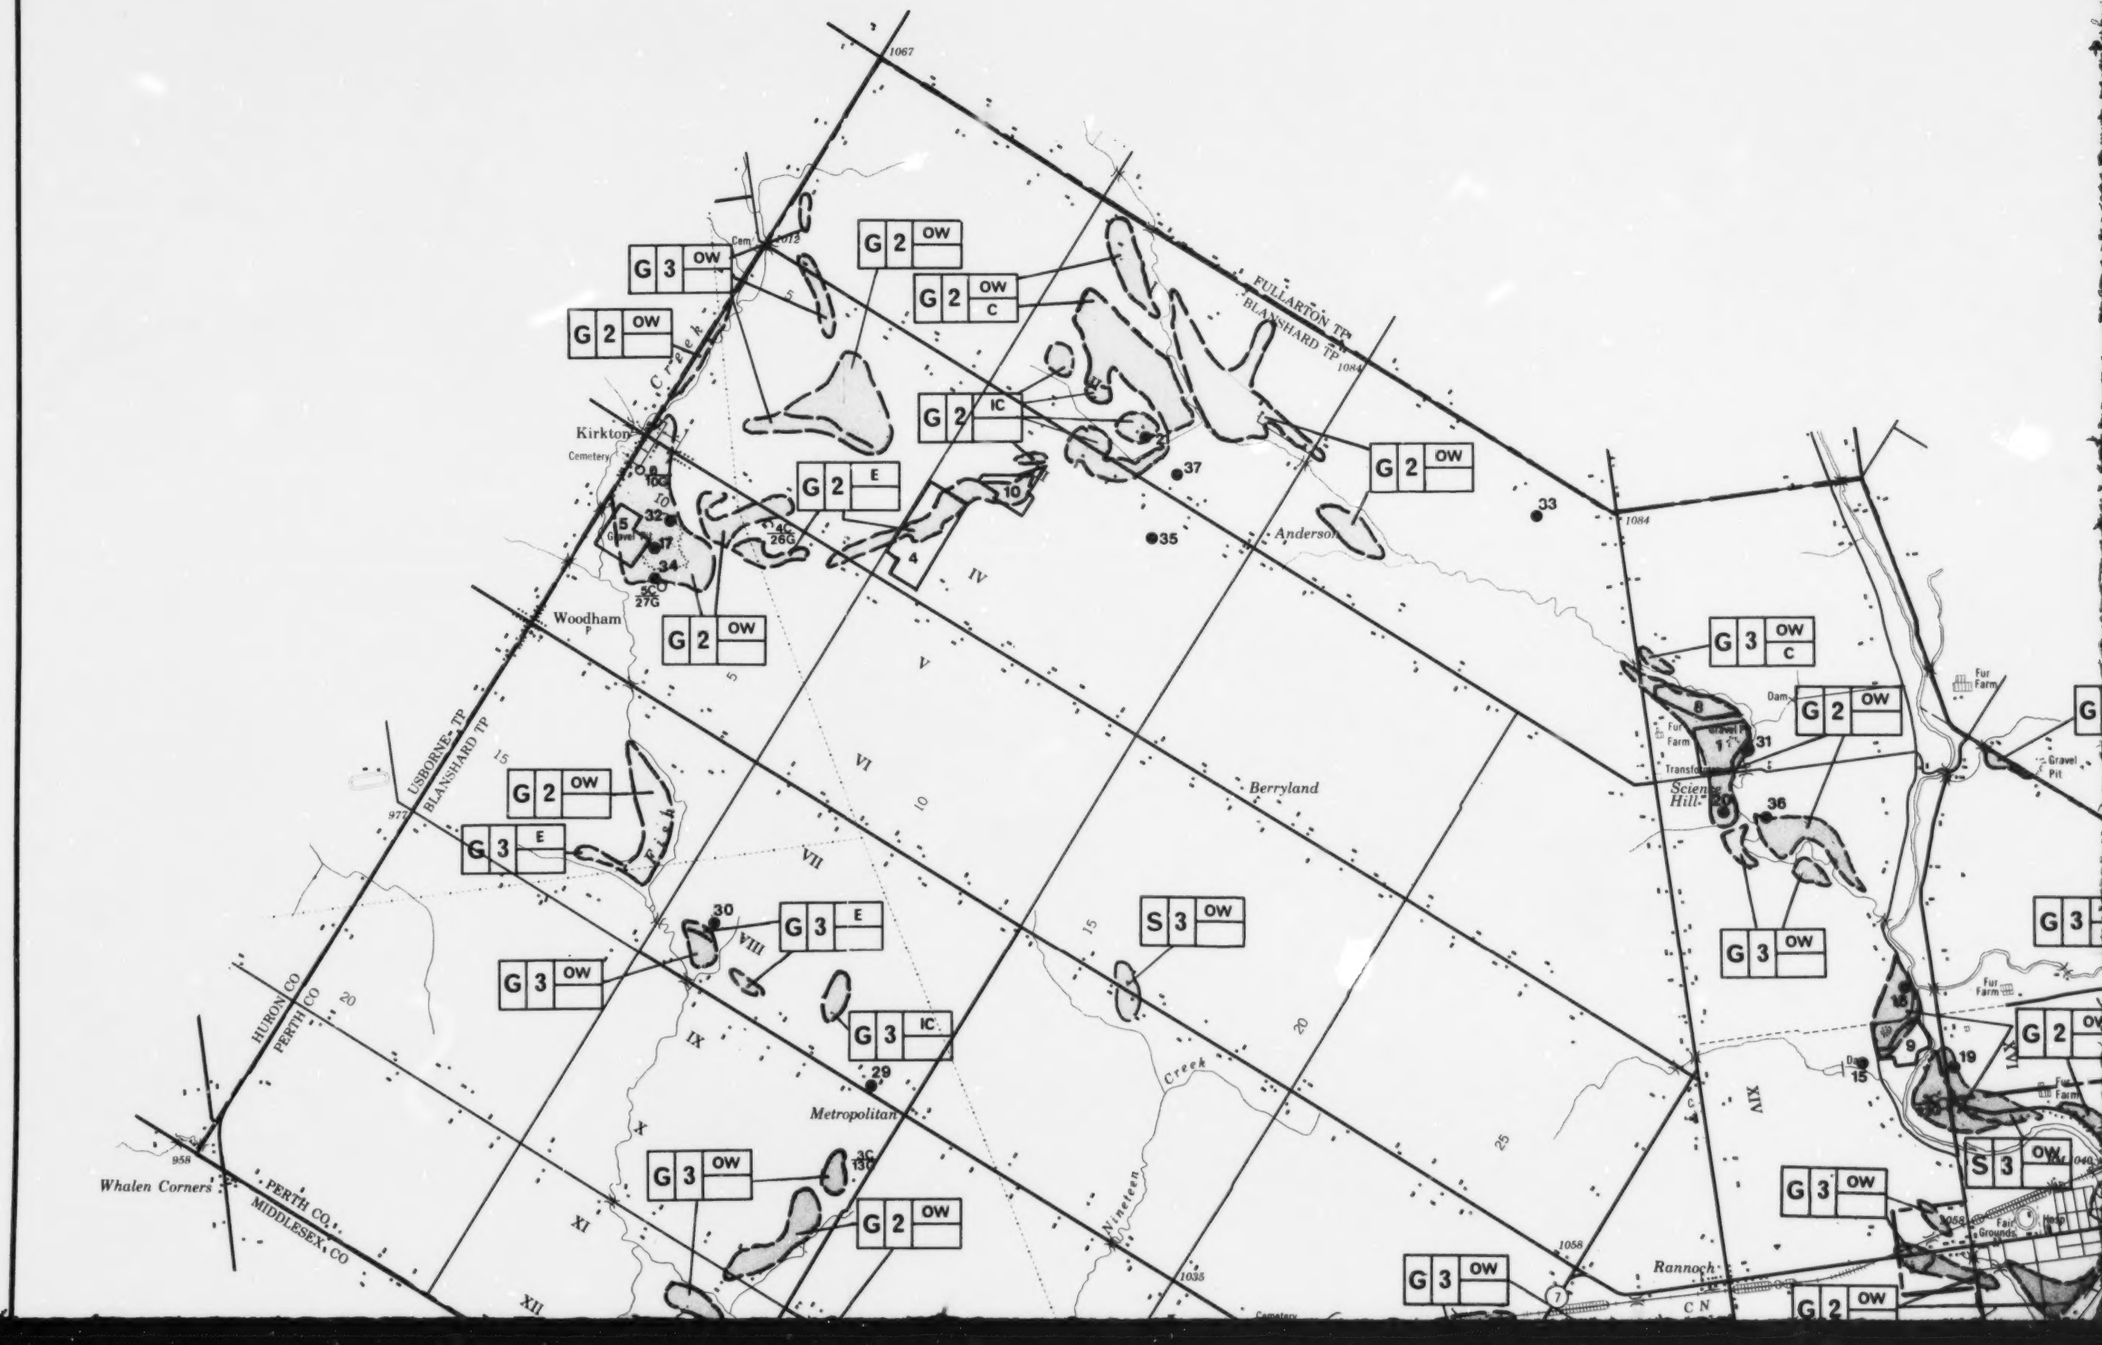
1067
FULLARTON TP
BLANSHARD TP
1084
G 2 OW
G 3 OW
G 2 OW C
G 2 IC
G 2 E
G 3 E
G 3 IC
S 3 OW
Kirkton
Cemetery
Creek
Woodham
USBORNE TP
BLANSHARD TP
HURON CO
PERTH CO
Whalen Corners
MIDDLESEX CO
Metropolitan
Berryland
Anderson
Rannoch
Science Hill
Gravel Pit
Fair Grounds
Dam
Fur Farm
Transformer
Nineteen Creek
C N
I
II
III
IV
V
VI
VII
VIII
IX
X
XI
XII
XIV
XIX
1058
1035
977
958

Ontario
ONTAR
AGGRE

BLANS

DISTRI
G

Mile 1
Metres

NTS

© OMNR-OGS 19

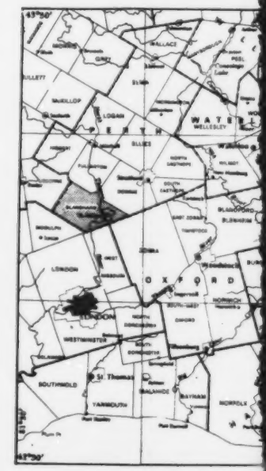

SYMBOLS

- Geological and aggregate thickness boundary. Sha deposit area.
- S1 IC CLO — Deposit symbol : see below.
- 3 — Licenced property boundary; Property number
- 4 — Unlicenced sand or gravel pit; Property number
- 8 / 23 — Selected drilling location indicating thickness overlying reported thickness of granular mate (Note: S-sand, G-gravel, C-clay, T-till)

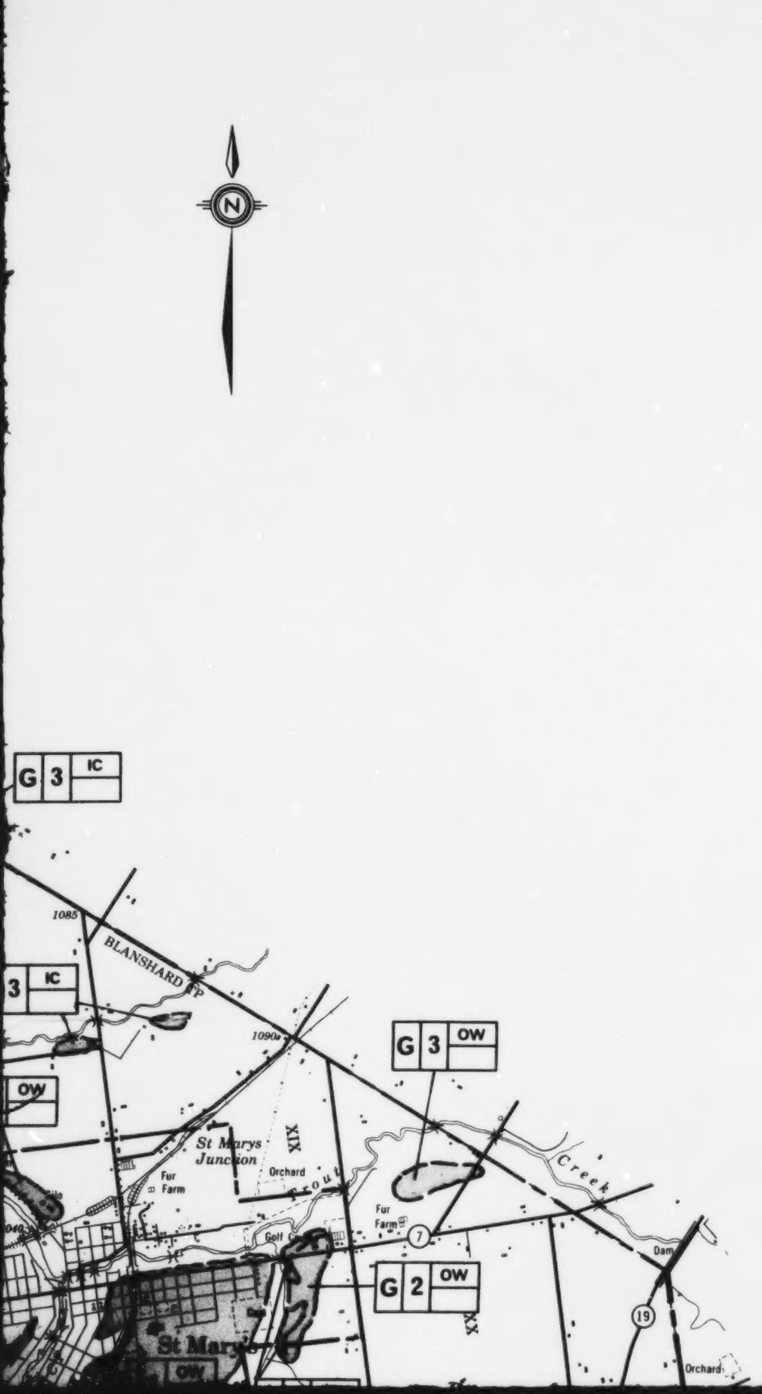

Ministry of Natural Resources

Ontario

Hon. James A.C. Auld
Minister

Dr. J.K. Reynolds
Deputy Minister

ONTARIO GEOLOGICAL SURVEY
AGGREGATE RESOURCES INVENTORY

BLANSHARD TOWNSHIP

PERTH COUNTY

MAP 1
DISTRIBUTION OF SAND AND GRAVEL DEPOSITS

Scale: 1:50,000

Mile 1 0 1 Mile

Metres 1000 0 1 Kilometre

NTS Reference: **40 P/3, 40 P/6**

© OMNR-OGS 1980

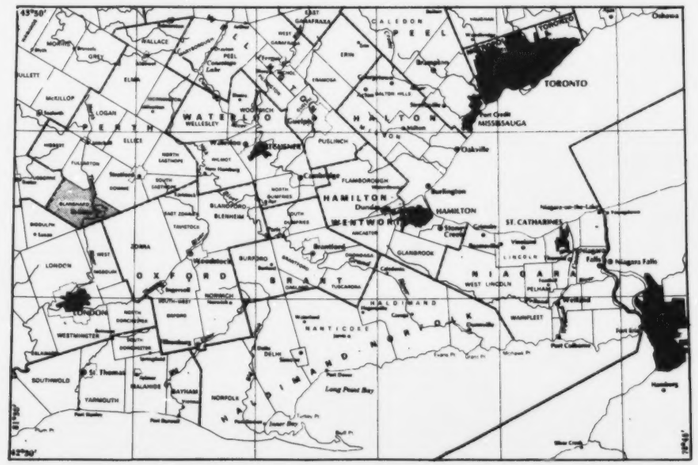

SYMBOLS

- Geological and aggregate thickness boundary. Shading indicates deposit area.
- S1 IC CLO — Deposit symbol: see below.
- 3 — Licenced property boundary; Property number: see Table 2.
- 4 — Unlicenced sand or gravel pit; Property number: See Table 2.
- 25 — Selected drilling location indicating thickness of overburden overlying reported thickness of granular materials (in feet). (Note: S-sand, G-gravel, C-clay, T-till)

Thickness Class

Class	Average Thickness in feet (metres)	Tons per acre (Tonnes per hectare)
1	greater than 20 (> 6)	greater than 50,000 (> 18 500)
2	10-20 (3-6)	25,000-50,000 (9 000-18 500)
3	5-10 (1.5-3)	12,500-25,000 (4 500-9 000)
4	less than 5	less than 12,500

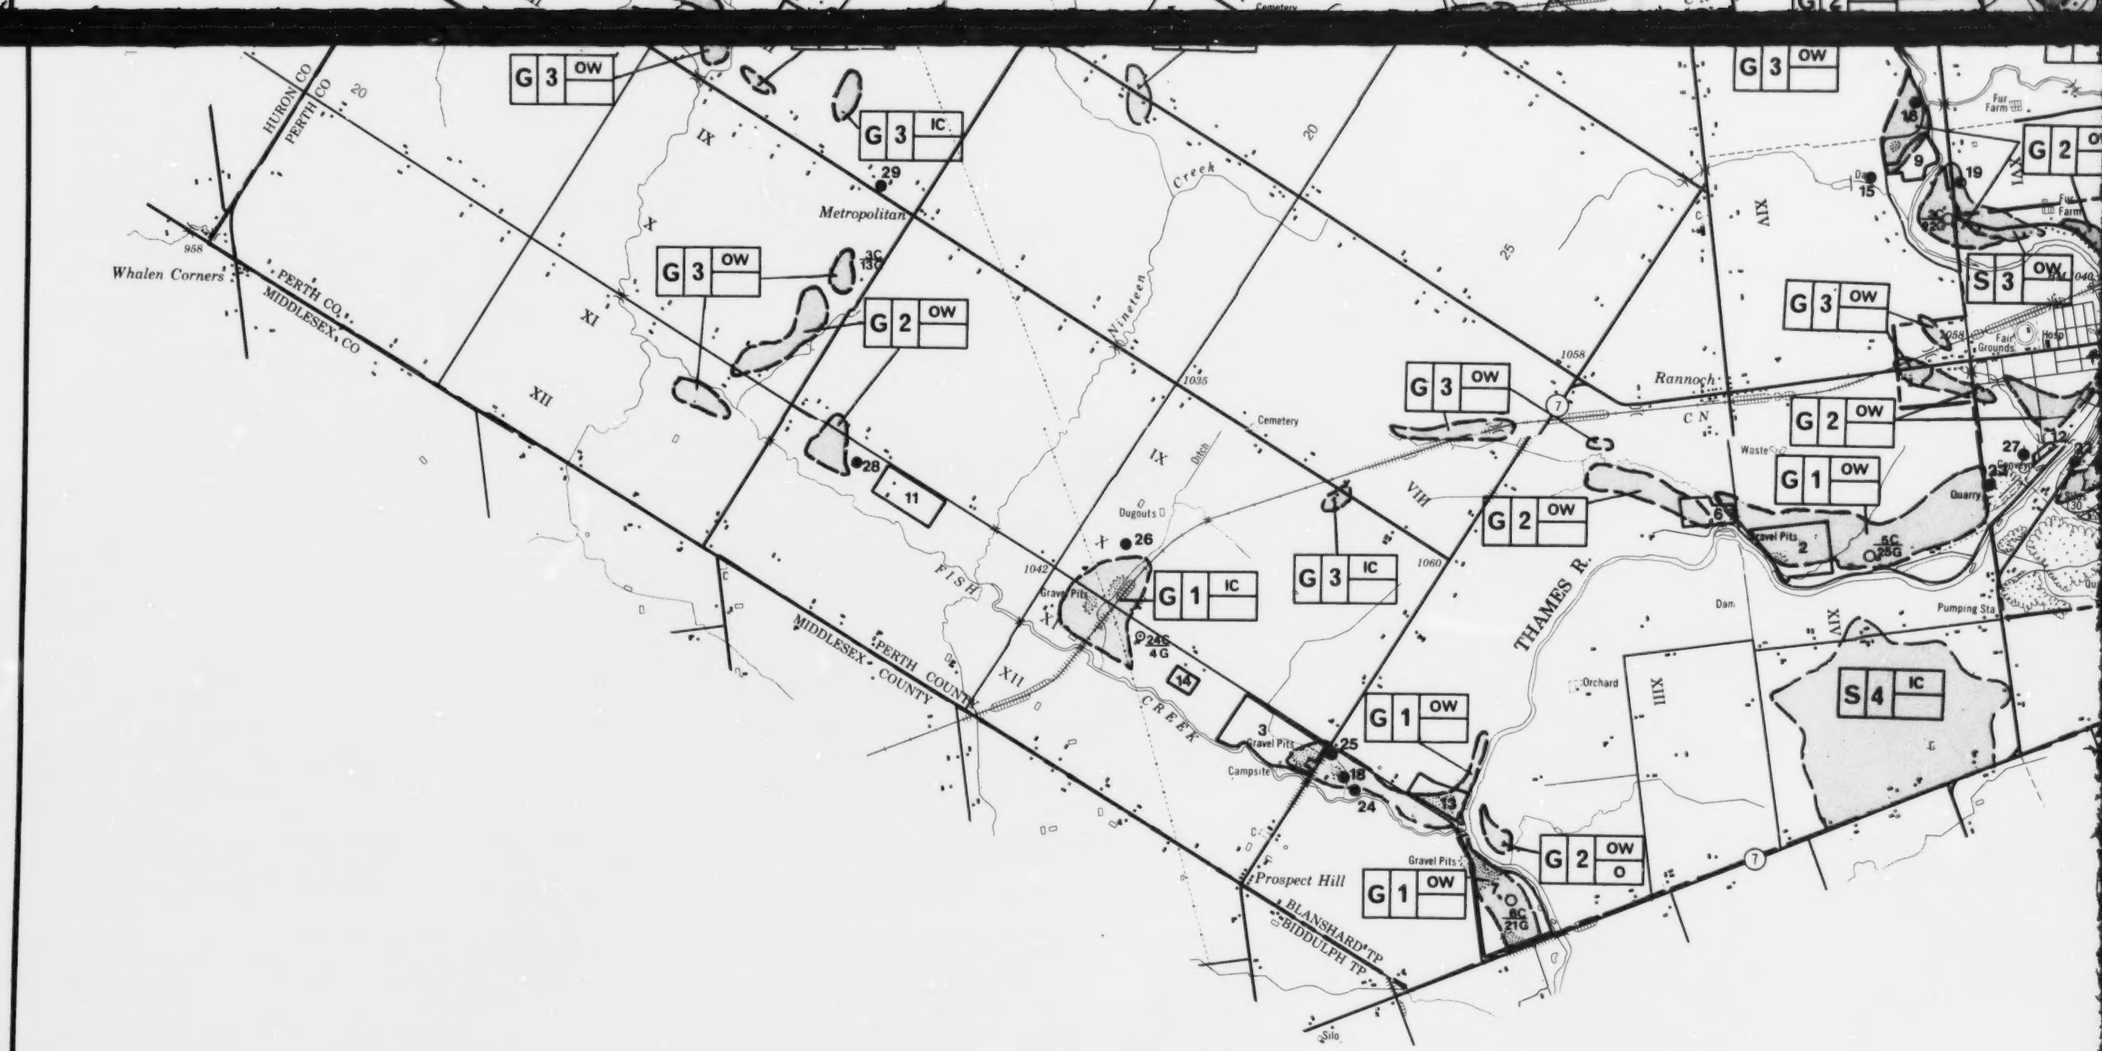
HURON CO
PERTH CO
PERTH CO.
MIDDLESEX CO
Whalen Corners
958
Metropolitan
Nineteen Creek
Cemetery
Rannoch
CN
Waste
Quarry
Gravel Pits
Dugouts
FISH
CREEK
MIDDLESEX COUNTY
PERTH COUNTY
THAMES R.
Dam
Pumping Sta
Orchard
Campsite
Prospect Hill
BLANSHARD TP
BIDDULPH TP
Silo
Fair Grounds
Hosp
Ditch
G 3 OW
G 3 IC
G 2 OW
G 1 IC
G 1 OW
G 2 O
S 3 OW
S 4 IC

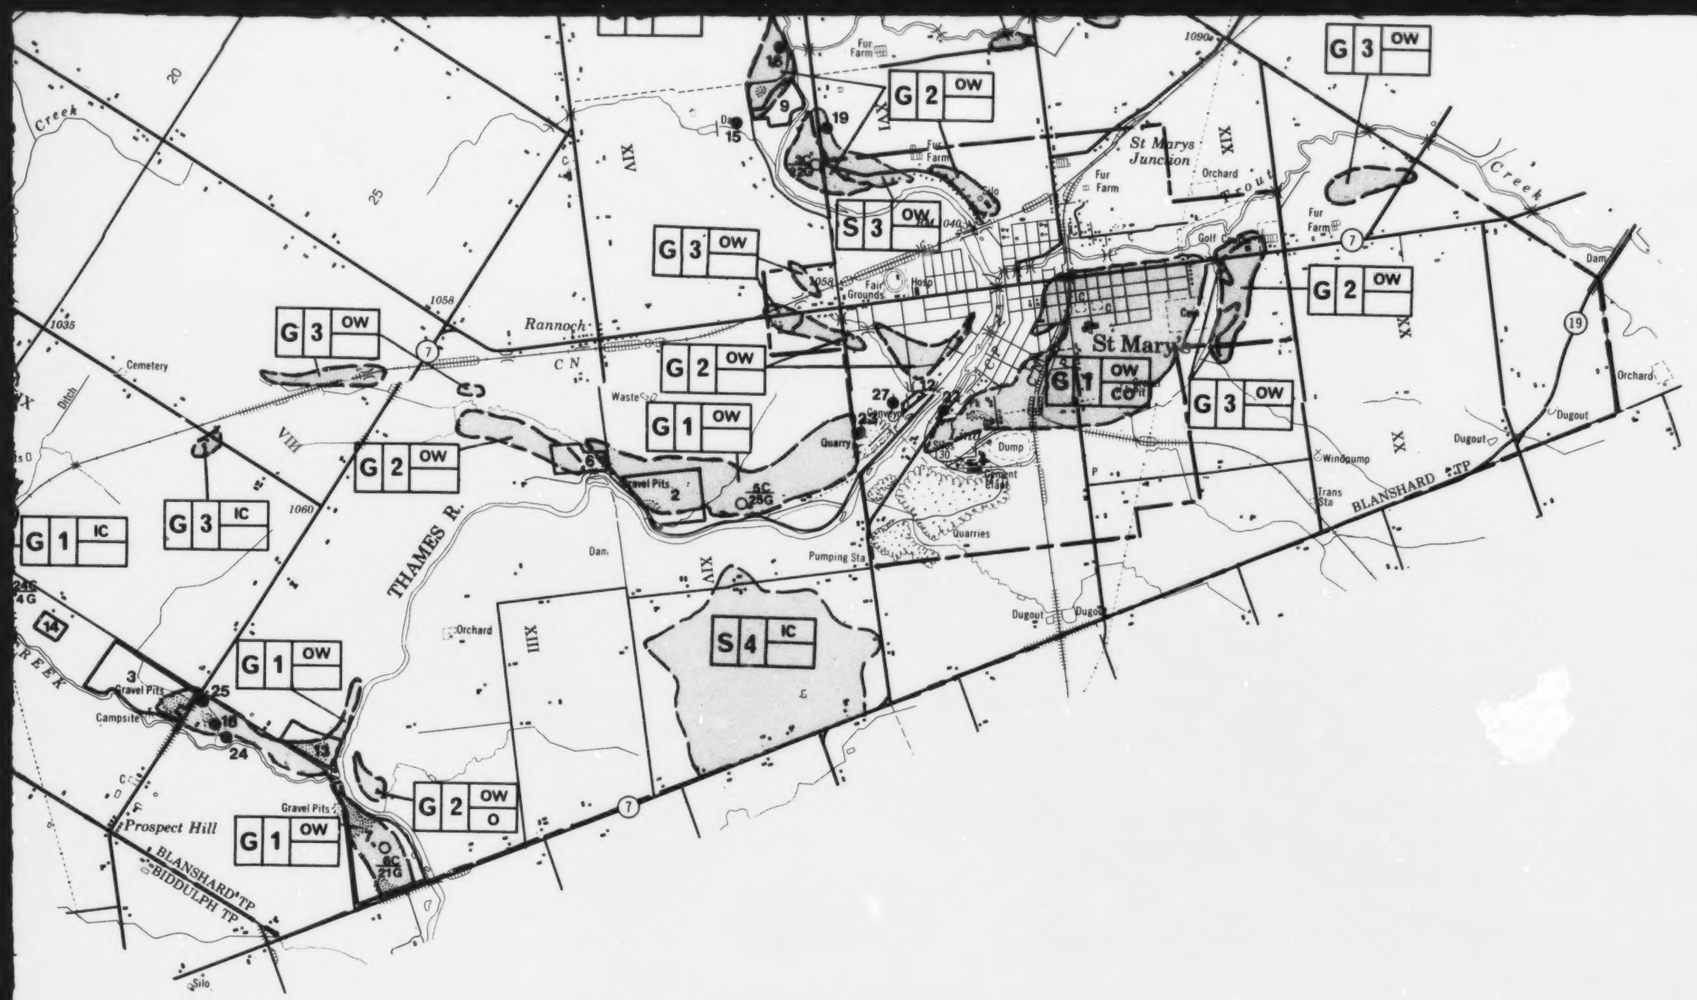

BLANSHARD

SYMBOLS

- Geological and aggregate thickness boundary. Shading indicates deposit area.
- S1 IC CLO — Deposit symbol: see below.
- 3 — Licenced property boundary; Property number: see Table 2.
- 4 — Unlicenced sand or gravel pit; Property number: See Table 2.
- 6/23 — Selected drilling location indicating thickness of overburden overlying reported thickness of granular materials (in feet). (Note: S-sand, G-gravel, C-clay, T-till)
- Municipal boundary.

DEPOSIT SYMBOL

Deposits are identified by gravel content, thickness class, deposit type and quality indicators. Gravel content is expressed as percentage of crushable material. Classes are based on potential aggregate tonnage per acre and are designated numerically. Type refers to geologic origin. Quality modifiers indicate variations in grain size distribution and lithology.

Gravel Content	Thickness Class	Geological Type
		Quality Indicators

Gravel Content

G	Greater than 35% gravel.
S	Less than 35% gravel.
?	Requires investigation

Thickness Class

Class	Aver (met
1	greate (> 6)
2	10-20 (3-6)
3	5-10 (1.5-3
4	less th (< 1.5

Geological Type

IC	Undif Conta
ICT	Ice-Co
K	Kame
E	Esker
EM	End M

(see Appendix C fo

Quality Indicators

	If blan
C	Clay a
L	Delete
O	Oversi quanti

SOURCES OF INFORMATION

Base map by Surveys and Mapping Branch, Ontario Ministry of Natural Resources.
Licence data from District and Regional Offices, Ontario Ministry of Natural Resources.
Aggregate suitability data from the Engineering Materials Office, Ontario Ministry of Transportation and Communications.
Selected drilling data from the Ontario Ministry of the Environment and the Petroleum Resources Section, Ontario Ministry of Natural Resources.

Geology by D. F. Hew
P.F. Karr
P.F. Karr
E.V. Sad
B.V. San
Compilation and draf

Issued 1980

This map is publishe
Ontario Geological Su
This map is to accor
Paper 9.

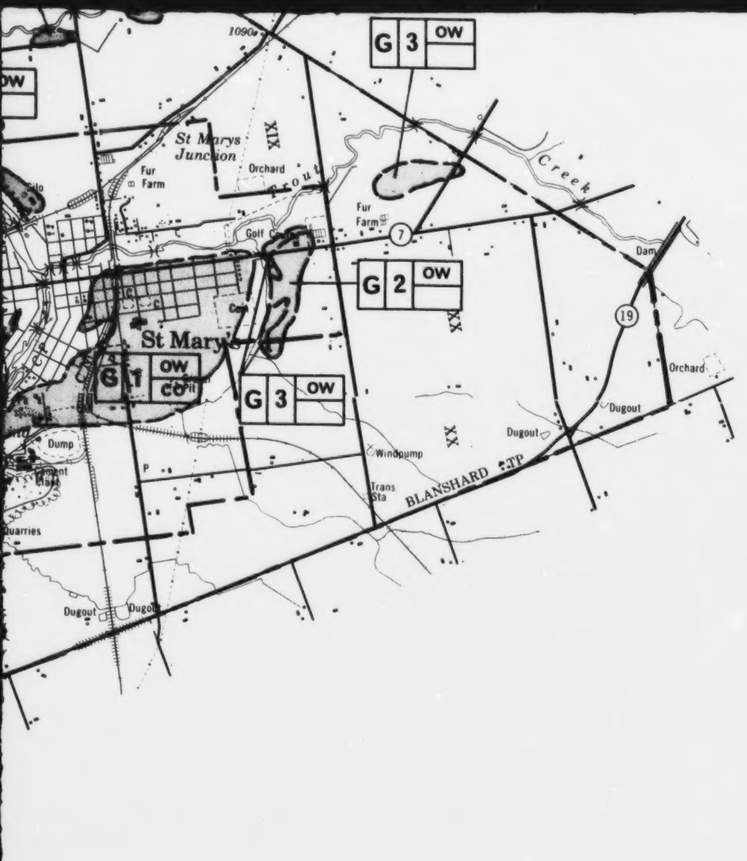

BLANSHARD

SYMBOLS

Geological and aggregate thickness boundary. Shading indicates deposit area.

Deposit symbol: see below.

Licenced property boundary; Property number: see Table 2.

Unlicenced sand or gravel pit; Property number: See Table 2.

Selected drilling location indicating thickness of overburden overlying reported thickness of granular materials (in feet). (Note: S-sand, G-gravel, C-clay, T-till)

Municipal boundary.

DEPOSIT SYMBOL

Deposits are identified by gravel content, thickness class, deposit type and quality indicators. Gravel content is expressed as percentage of crushable material. Classes are based on potential aggregate tonnage per acre and are designated numerically. Type refers to geologic origin. Quality modifiers indicate variations in grain size distribution and lithology.

Gravel Content	Thickness Class	Geological Type
		Quality Indicators

Gravel Content

G	Greater than 35% gravel.
S	Less than 35% gravel.
?	Requires investigation

Thickness Class

Class	Average Thickness in feet (metres)	Tons per acre (Tonnes per hectare)
1	greater than 20 (> 6)	greater than 50,000 (> 18 500)
2	10-20 (3-6)	25,000-50,000 (9 000-18 500)
3	5-10 (1.5-3)	12,500-25,000 (4 500-9 000)
4	less than 5 (< 1.5)	less than 12,500 (< 4 500)

Geological Type

IC	Undifferentiated Ice-Contact Stratified Drift	OW	Outwash
		LB	Lacustrine Beach
ICT	Ice-Contact Terrace	LP	Lacustrine Plain
K	Kame	LD	Lacustrine Delta
E	Esker	AL	Older Alluvium
EM	End Moraine	WD	Windblown Forms

(see Appendix C for descriptions of Geological Types.)

Quality Indicators

	If blank, no known limitations present
C	Clay and/or silt (fines) present in objectionable quantities
L	Deleterious lithologies present
O	Oversize particles or fragments present in objectionable quantities

SOURCES OF INFORMATION

Base map by Surveys and Mapping Branch, Ontario Ministry of Natural Resources.
Licence data from District and Regional Offices, Ontario Ministry of Natural Resources.
Aggregate suitability data from the Engineering Materials Office, Ontario Ministry of Transportation and Communications.
Selected drilling data from the Ontario Ministry of the Environment and the Petroleum Resources Section, Ontario Ministry of Natural Resources.

Geology by D. F. Hewitt, 1972
P.F. Karrow, 1965, 1977
P.F. Karrow and A.J. Ferguson, 1974 (Rev.)
E.V. Sado and U.J. Vagners, 1975
B.V. Sanford, 1969

Compilation and drafting by P.A. Rizzuto and W.D. Fitzgerald

Issued 1980

This map is published with the permission of E.G. Pye, Director, Ontario Geological Survey.
This map is to accompany O.G.S. Aggregate Resources Inventory Paper 9.

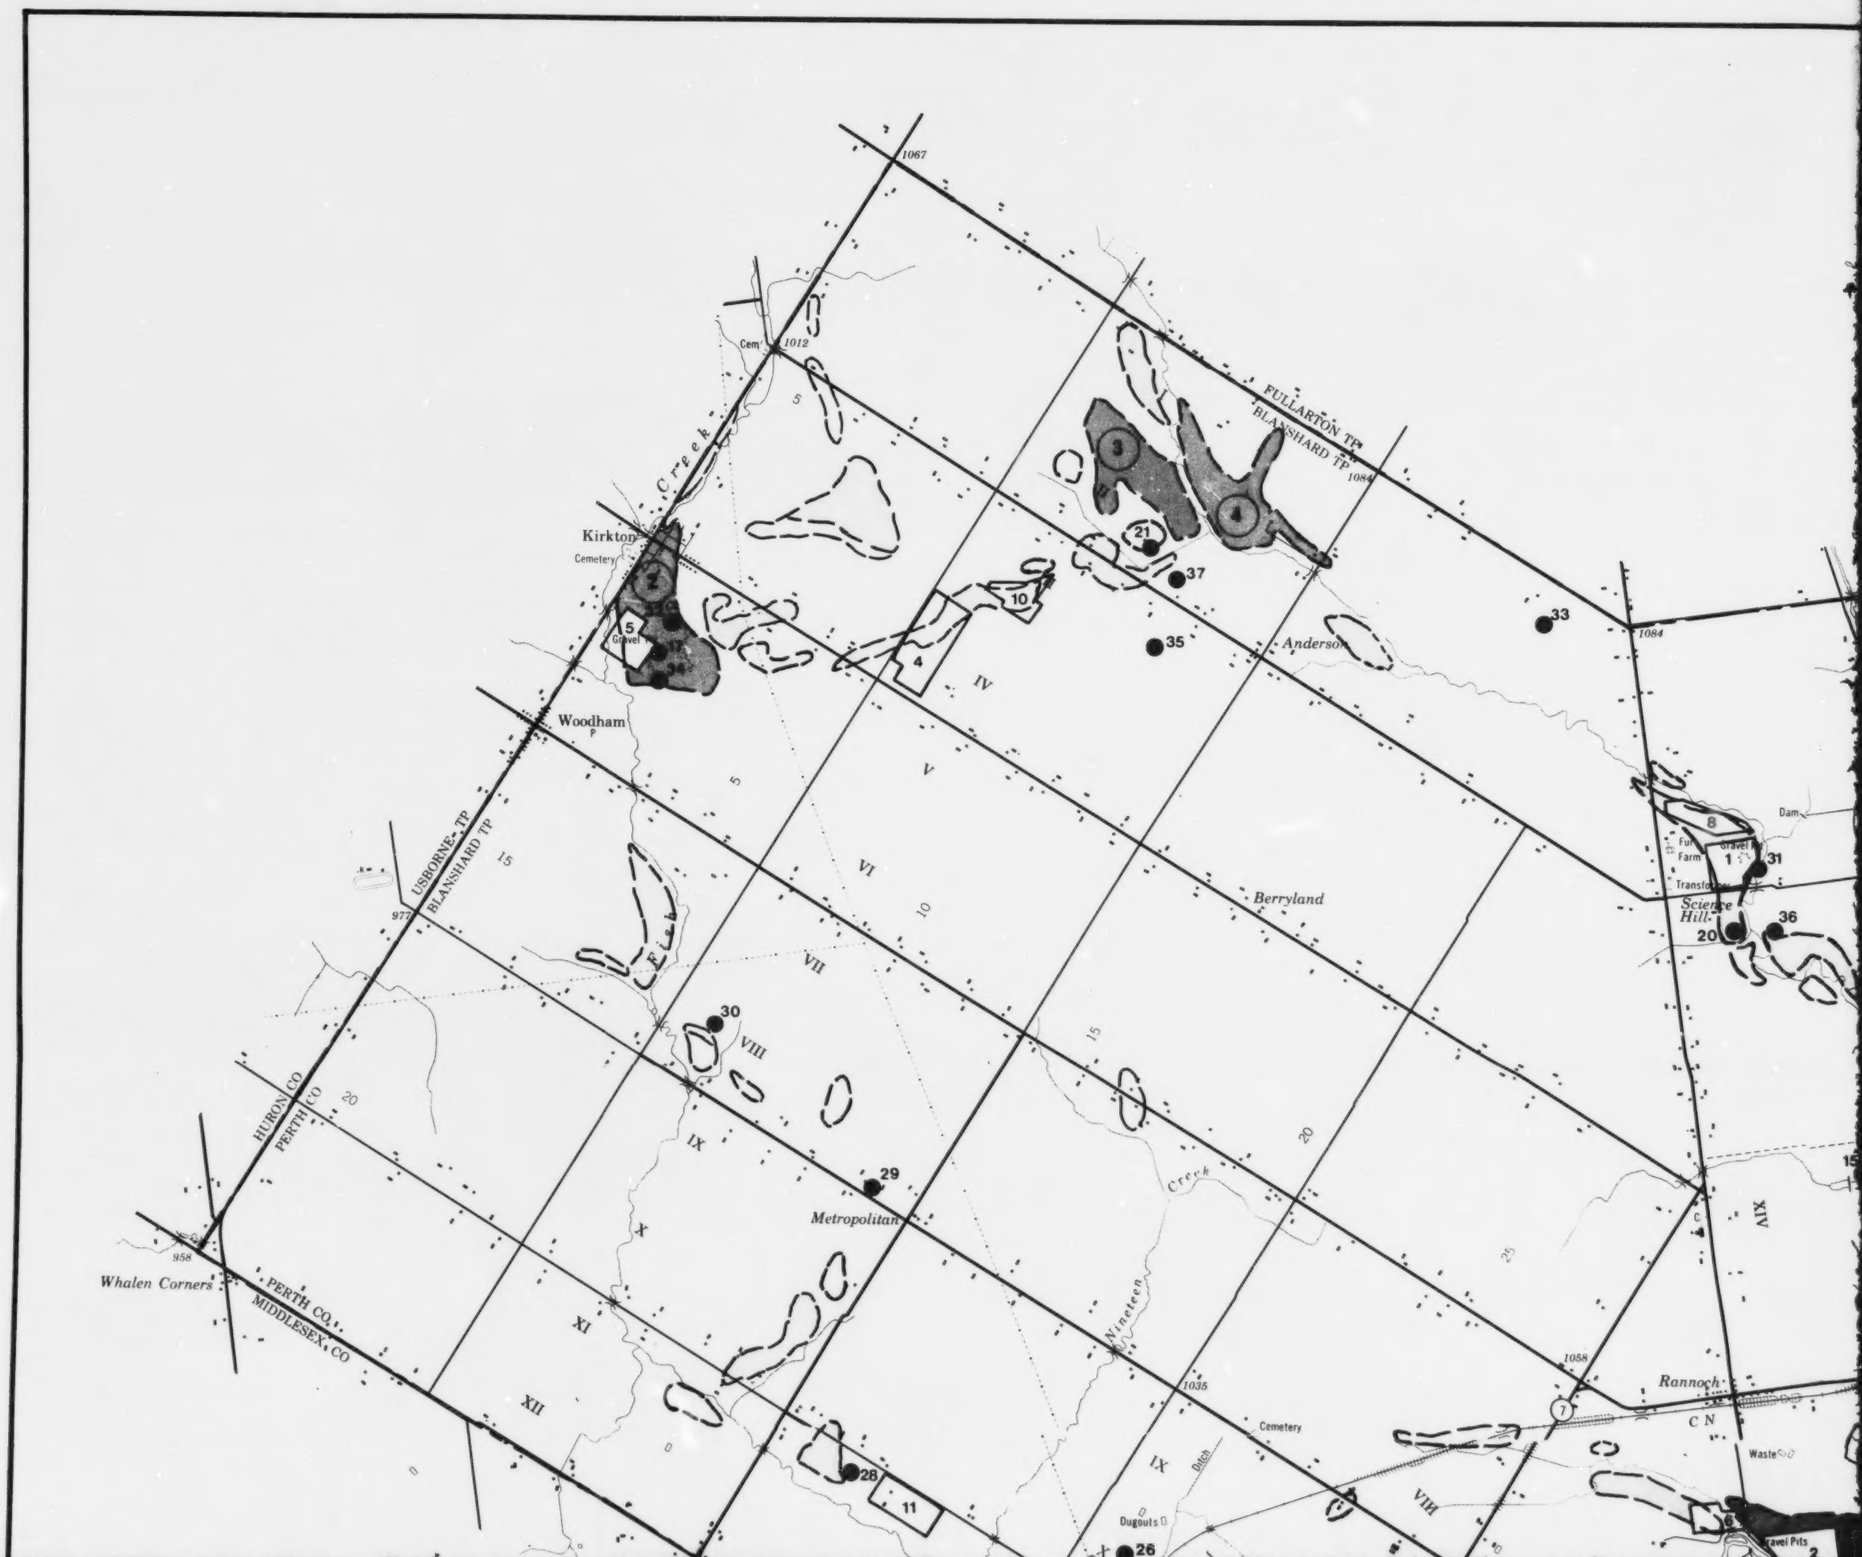
1067
1012
Cem
Creek
FULLARTON TP
BLANSHARD TP
1084
Kirkton
Cemetery
Gravel
Woodham
USBORNE TP
BLANSHARD TP
977
HURON CO
PERTH CO
958
Whalen Corners
PERTH CO.
MIDDLESEX CO
Anderson
Berryland
Science Hill
Metropolitan
Creek
Nineteen
Rannoch
1058
1035
Cemetery
Ditch
Dugouts
Dam
Transformer
Waste
Gravel Pits
C N
I
II
III
IV
V
VI
VII
VIII
IX
X
XI
XII
XIV
XIX
1
2
3
4
5
10
11
20
21
28
29
30
31
33
34
35
36
37

Ontario

Ministry of Natural Resources

Hon. J
Minister

Dr. J. K
Deputy

ONTARIO GEOLOGICAL

AGGREGATE RESOURCES INV

BLANSHARD TOV

PERTH COUNTY

MAP 2
SELECTED SAND AND
RESOURCE ARE

Scale: 1:50,000

Mile 1 0

Metres 1000 0

NTS Reference: 40 P/3, 40 P/

© OMNR-OGS 1980

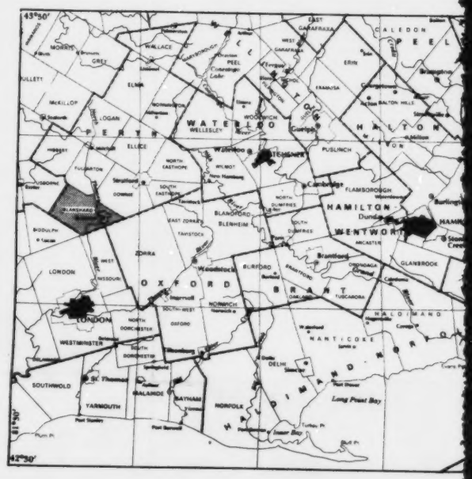

SYMBOLS

(Some symbols may not apply to thi

- Geological and aggregate thickness boun
- Selected sand and gravel resource area; Deposit number: see Table 3.
- Selected sand and gravel resource area; Se
- Selected sand and gravel resource area
- 2 — Licenced property boundary; Property
- 4 — Unlicenced sand or gravel pit; Property nu

Ministry of Natural Resources

Ontario

Hon. James A.C. Auld
Minister

Dr. J.K. Reynolds
Deputy Minister

ONTARIO GEOLOGICAL SURVEY
AGGREGATE RESOURCES INVENTORY

BLANSHARD TOWNSHIP
PERTH COUNTY

MAP 2
SELECTED SAND AND GRAVEL RESOURCE AREAS

Scale: 1:50,000

Mile 1 0 1 Mile

Metres 1000 0 1 Kilometre

NTS Reference: **40 P/3, 40 P/6**

© OMNR-OGS 1980

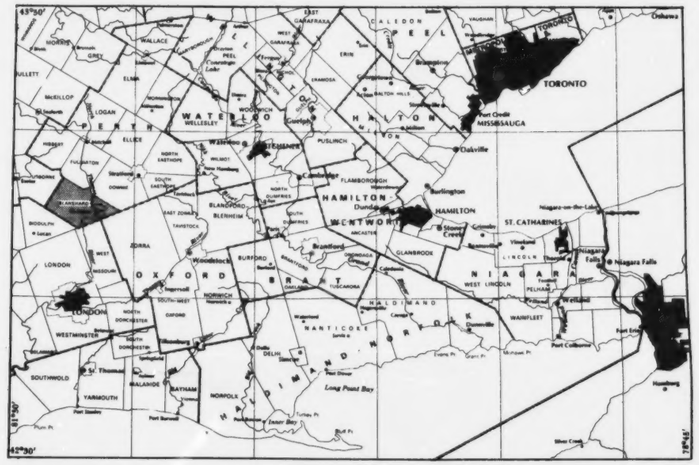
PERTH
WATERLOO
WELLINGTON
HALTON
PEEL
TORONTO
HAMILTON
WENTWORTH
OXFORD
BRANT
NIAGARA
HALDIMAND
NORFOLK
LONDON
Toronto
Port Credit
MISSISSAUGA
Oakville
Burlington
HAMILTON
ST. CATHARINES
Niagara Falls
Niagara-on-the-Lake
Woodstock
Brantford
Paris
Simcoe
Port Colborne
Wainfleet
Long Point Bay
Lake Erie
Lake Ontario
Owen Sound
Orillia
Barrie
Hamilton
Kitchener
Guelph
Stratford
London
St. Thomas
Tillsonburg
Dunnville
Welland
Fort Erie
Hagersville
Cayuga
Caledonia
Milton
Georgetown
Acton
Orangeville
Shelburne
Dundalk
Flesherton
Meaford
Thornbury
Collingwood
Wiarton
Tobermory
Southampton
Kincardine
Goderich
Exeter
Clinton
Wingham
Listowel
Mitchell
St. Marys
Stratford
Tavistock
Ingersoll
Norwich
Delhi
Simcoe
Port Dover
Port Rowan
Port Burwell
Port Stanley
Aylmer
Tillsonburg
Dunnville
Port Colborne
Fort Erie
Niagara Falls
Welland
Grimsby
Beamsville
St. Catharines
Thorold
Port Dalhousie
Jordan
Vineland
Lincoln
Smithville
Caledonia
Hagersville
Cayuga
Dunnville
Port Maitland
Selkirk
Port Rowan
Port Dover
Simcoe
Delhi
Tillsonburg
Ingersoll
Woodstock
Brantford
Paris
Cambridge
Kitchener
Waterloo
Guelph
Elora
Fergus
Orangeville
Shelburne
Alliston
Barrie
Orillia
Bradford
Newmarket
Aurora
Richmond Hill
Markham
Stouffville
Uxbridge
Pickering
Ajax
Whitby
Oshawa
Bowmanville
Port Hope
Cobourg
Brighton
Trenton
Belleville
Picton
Wellington
Bloomfield
Consecon
Napanee
Deseronto
Tweed
Madoc
Marmora
Campbellford
Norwood
Peterborough
Lindsay
Bobcaygeon
Fenelon Falls
Omemee
Port Perry
Uxbridge
Sutton
Keswick
Georgina
Beaverton
Cannington
Sunderland
Brechin
Orillia
Gravenhurst
Bracebridge
Huntsville
Parry Sound
Midland
Penetanguishene
Collingwood
Stayner
Wasaga Beach
Creemore
Meaford
Thornbury
Owen Sound
Wiarton
Tobermory
Southampton
Port Elgin

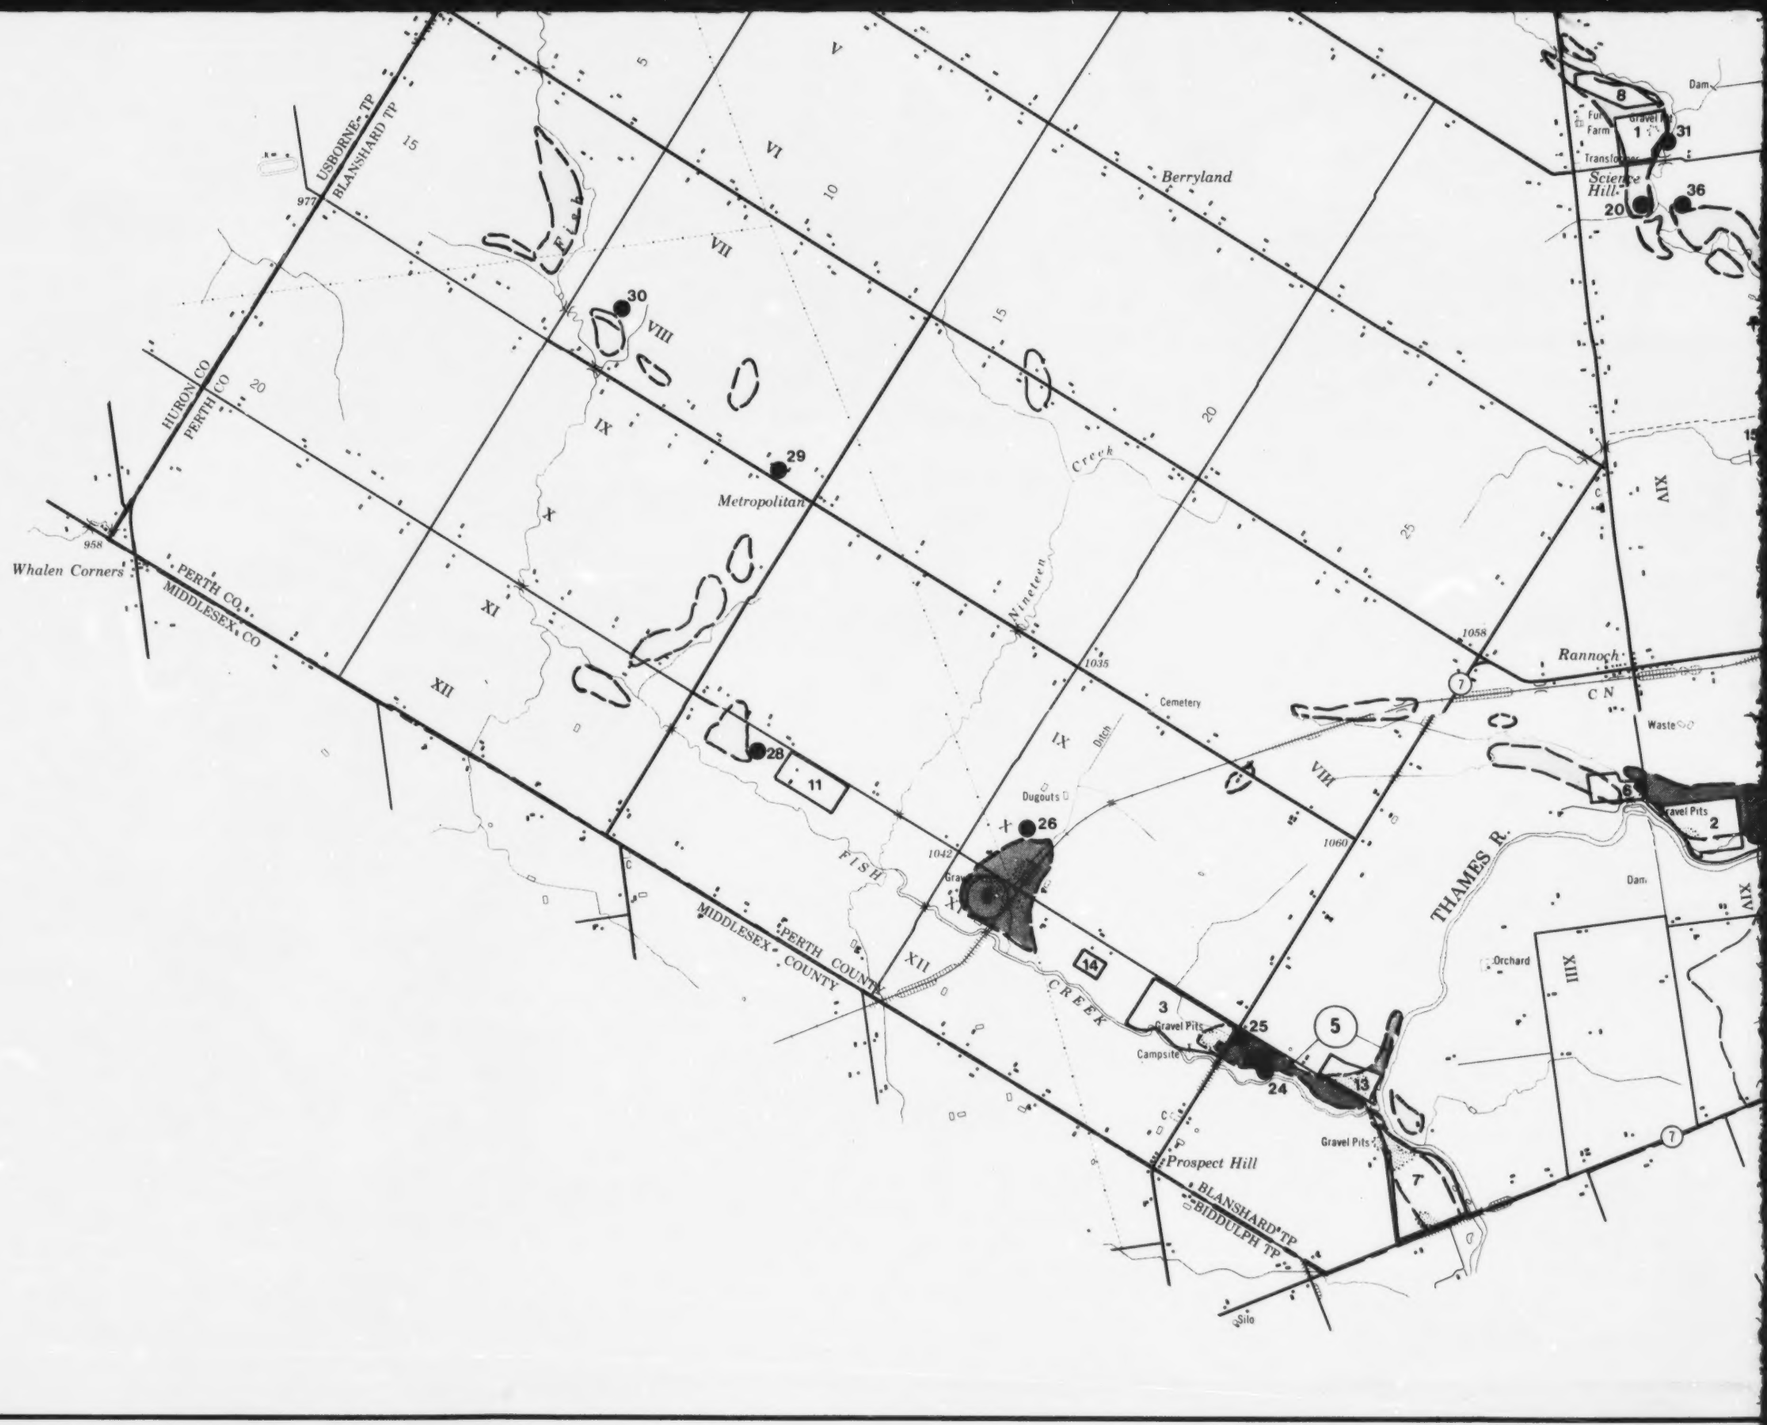
USBORNE TP
BLANSHARD TP
HURON CO
PERTH CO
Whalen Corners
PERTH CO
MIDDLESEX CO
Creek
Berryland
Science Hill
Metropolitan
Nineteen Creek
Rannoch
Cemetery
Dugouts
Gravel Pits
Campsite
Orchard
Waste
Dam
FISH CREEK
THAMES R.
MIDDLESEX COUNTY
PERTH COUNTY
Prospect Hill
BLANSHARD TP
BIDDULPH TP
Silo
C N
I
II
III
IV
V
VI
VII
VIII
IX
X
XI
XII
XIII
XIV
XIX
958
975
1035
1042
1058
1060

BLANSHARD

SYMBOLS

(Some symbols may not apply to this

Geological and aggregate thickness bounda

Selected sand and gravel resource area; P
Deposit number: see Table 3.

Selected sand and gravel resource area; Sec

Selected sand and gravel resource area;

Licenced property boundary; Property nu

Unlicenced sand or gravel pit; Property nu

Municipal boundary.

SOURCES OF INFORMATION

Base map by Surveys and Mapping Branch, Onta
Natural Resources.
Licence data from District and Regional Offices, O
of Natural Resources.
Aggregate suitability data from the Engineering M
Ontario Ministry of Transportation and Communicati
Selected drilling data from the Ontario Ministry of t
and the Petroleum Resources Section, Ontario Min
Resources.

Geology by D.F. Hewitt, 1972 — E.V. Sac
P.F. Karrow, 1965, 1977 — U.J.
P.F. Karrow and A.J. Ferguson, 1974 (Rev.) — B.V. Sar

Compilation and drafting by P.A. Rizzuto and W.D.

Issued 1980

This map is published with the permission of E.G.
Ontario Geological Survey.

This map is to accompany O.G.S. Aggregate Resou
Paper 9.

BLANSHARD

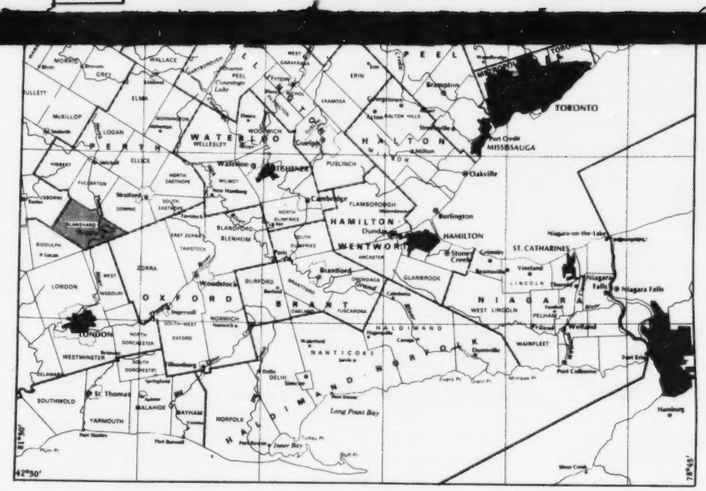

SYMBOLS

(Some symbols may not apply to this map)

- Geological and aggregate thickness boundary.
- Selected sand and gravel resource area; Primary significance; Deposit number: see Table 3.
- Selected sand and gravel resource area; Secondary significance.
- Selected sand and gravel resource area; Tertiary significance.
- 2 — Licenced property boundary; Property number: see Table 2.
- 4 — Unlicenced sand or gravel pit; Property number: See Table 2.
- Municipal boundary.

SOURCES OF INFORMATION

Base map by Surveys and Mapping Branch, Ontario Ministry of Natural Resources.
Licence data from District and Regional Offices, Ontario Ministry of Natural Resources.
Aggregate suitability data from the Engineering Materials Office, Ontario Ministry of Transportation and Communications.
Selected drilling data from the Ontario Ministry of the Environment and the Petroleum Resources Section, Ontario Ministry of Natural Resources.

Geology by D.F. Hewitt, 1972
P.F. Karrow, 1965, 1977
P.F. Karrow and A.J. Ferguson, 1974 (Rev.)
E.V. Sado and U.J. Vagners, 1975
B.V. Sanford, 1969

Compilation and drafting by P.A. Rizzuto and W.D. Fitzgerald

Issued 1980

This map is published with the permission of E.G. Pye, Director, Ontario Geological Survey.

This map is to accompany O.G.S. Aggregate Resources Inventory Paper 9.

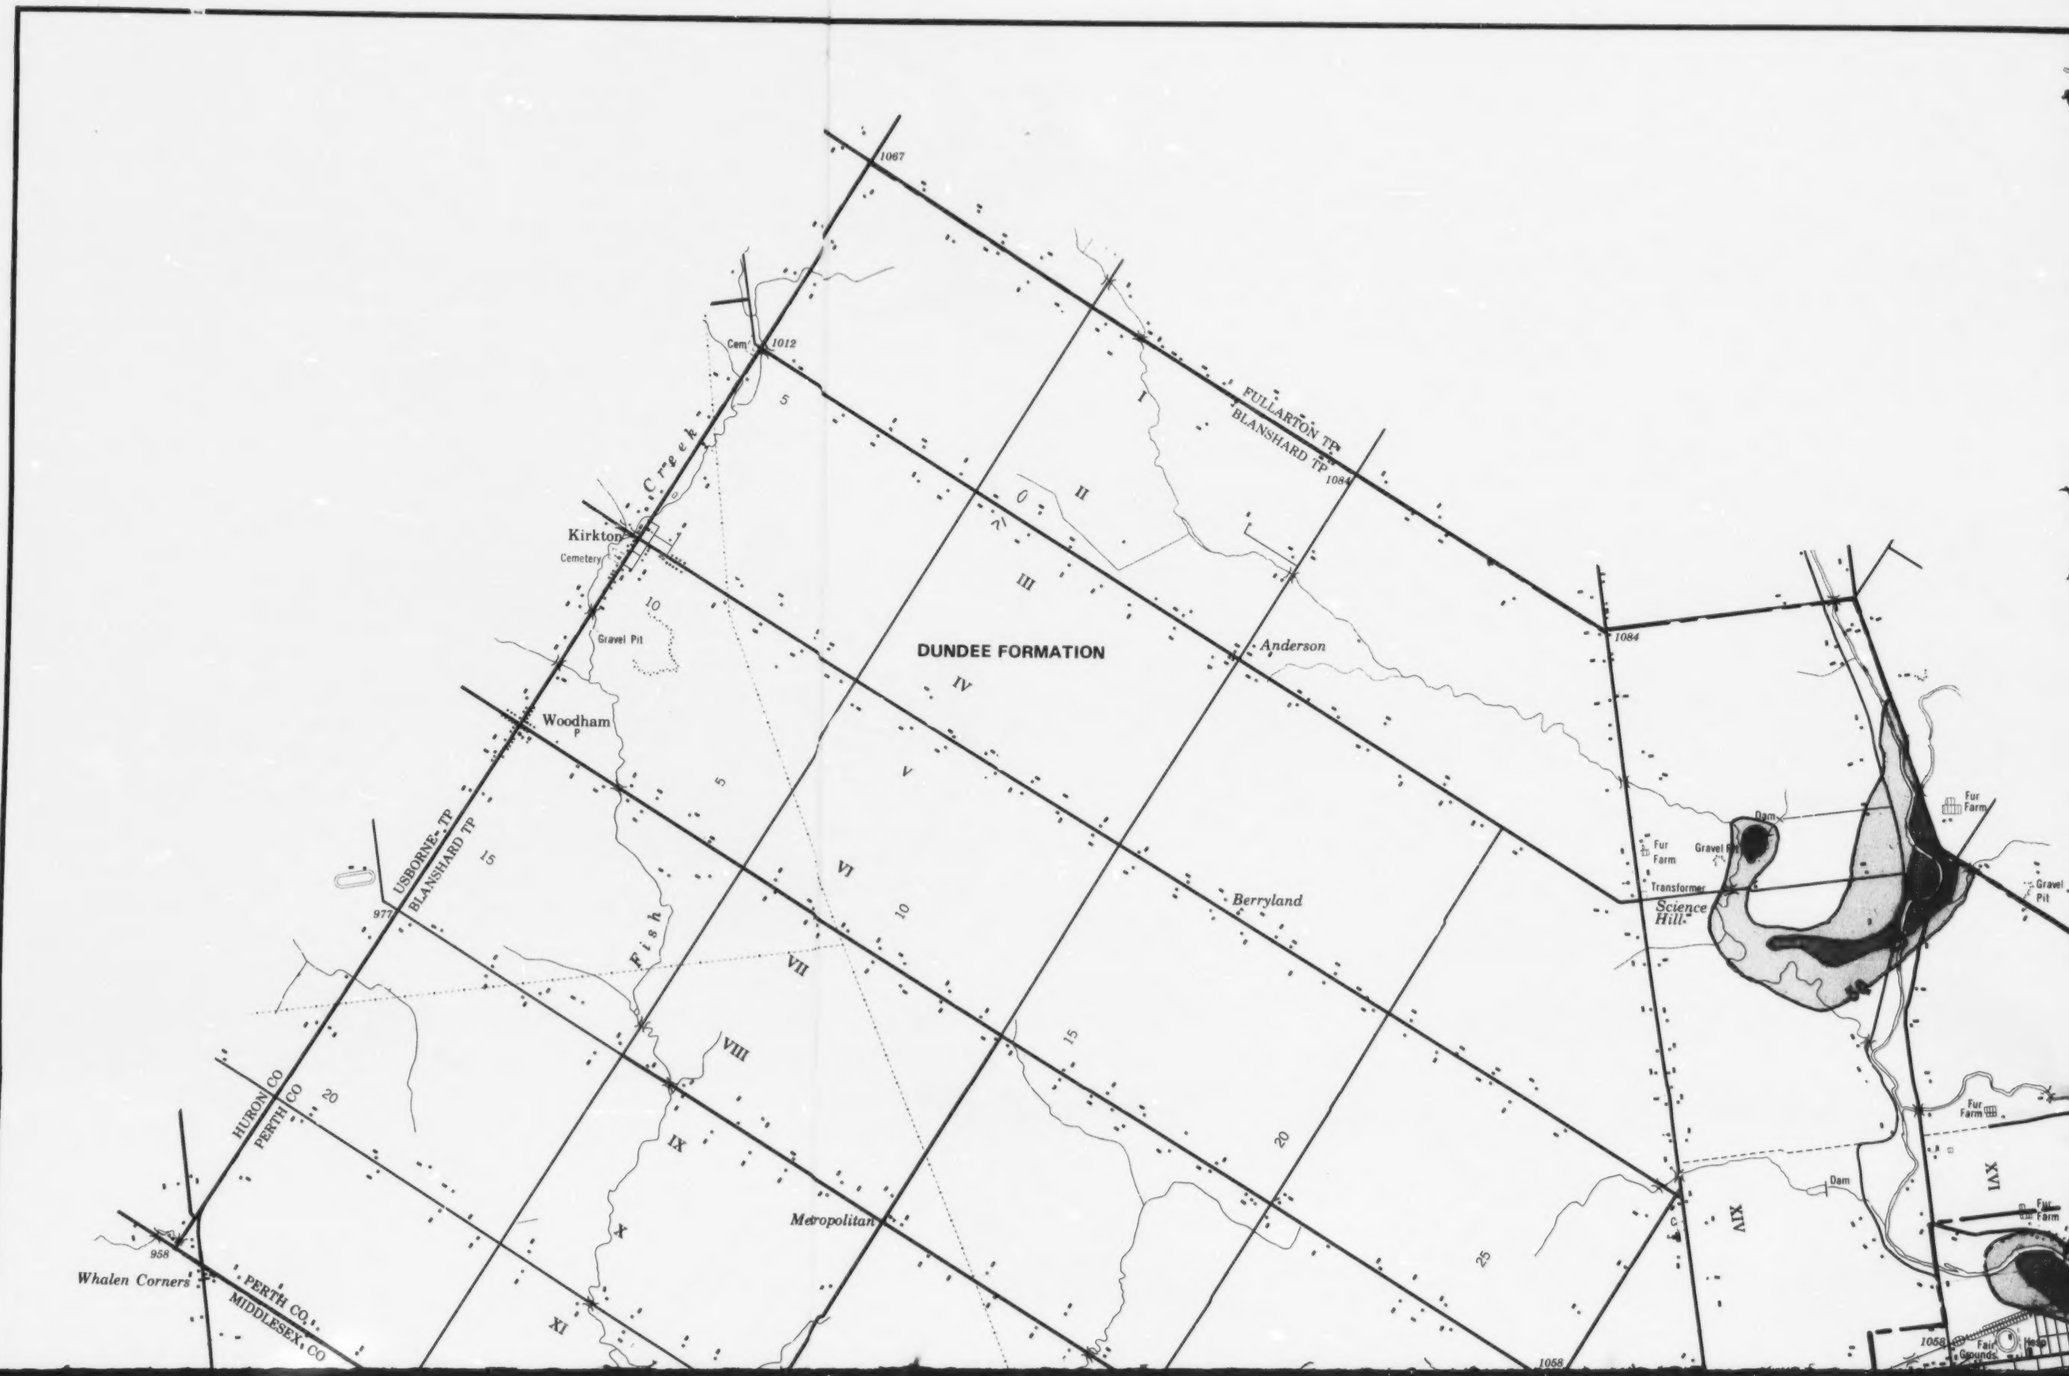
1067
Cem'
1012
5
Creek
Kirkton
Cemetery
10
Gravel Pit
Woodham
P
977
LISBORNE TP
BLANSHARD TP
15
Fish
HURON CO
PERTH CO
20
958
Whalen Corners
PERTH CO
MIDDLESEX CO
XI
X
IX
VIII
VII
VI
V
IV
III
II
I
0
DUNDEE FORMATION
FULLARTON TP
BLANSHARD TP
1084
Anderson
Berryland
Metropolitan
15
20
25
1058
Dam
Fur Farm
Gravel Pit
Transformer
Science Hill
XIV
XVI
Fair Grounds

1067

1012

5

FULLARTON TP

BLANSHARD TP

1084

I

II

III

IV

V

VI

VII

10

15

20

25

DUNDEE FORMATION

Anderson

Berryland

Metropolitan

Science Hill

Dam

Fur Farm

Gravel Pit

Transformer

1085

BLANSHARD TP

1090

XIX

XVI

XIV

St Marys Junction

Orchard

Silo

Creek

Farm

7

19

1058

Fair Grounds

Hoop

Dam

© OMNR-

Or

OF

BL

Ministry of Natural Resources
Ontario

Hon. James A.C. Auld
Minister

Dr. J.K. Reynolds
Deputy Minister

ONTARIO GEOLOGICAL SURVEY
AGGREGATE RESOURCES INVENTORY

BLANSHARD TOWNSHIP

PERTH COUNTY

MAP 3
BEDROCK RESOURCES

Scale: 1:50,000

Mile 1 0 1 Mile

Metres 1000 0 1 Kilometre

NTS Reference: **40 P/3, 40 P/6**

© OMNR-OGS 1980

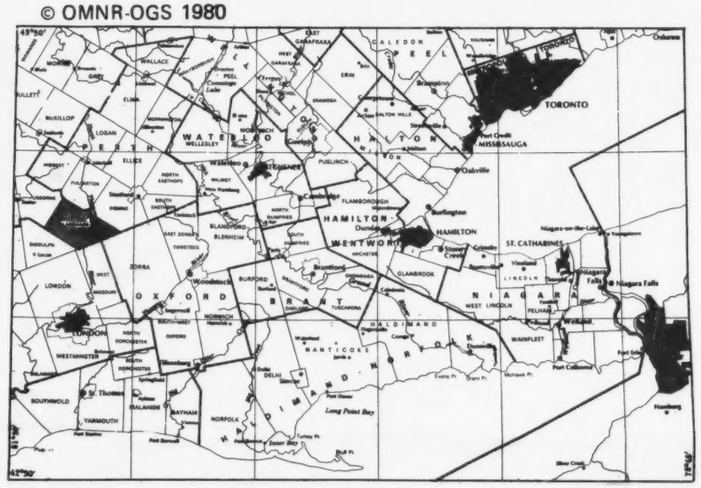

LEGEND

PALEOZOIC

DEVONIAN

MIDDLE DEVONIAN

DUNDEE FORMATION
Limestone

DETROIT RIVER GROUP
Limestone and dolostone

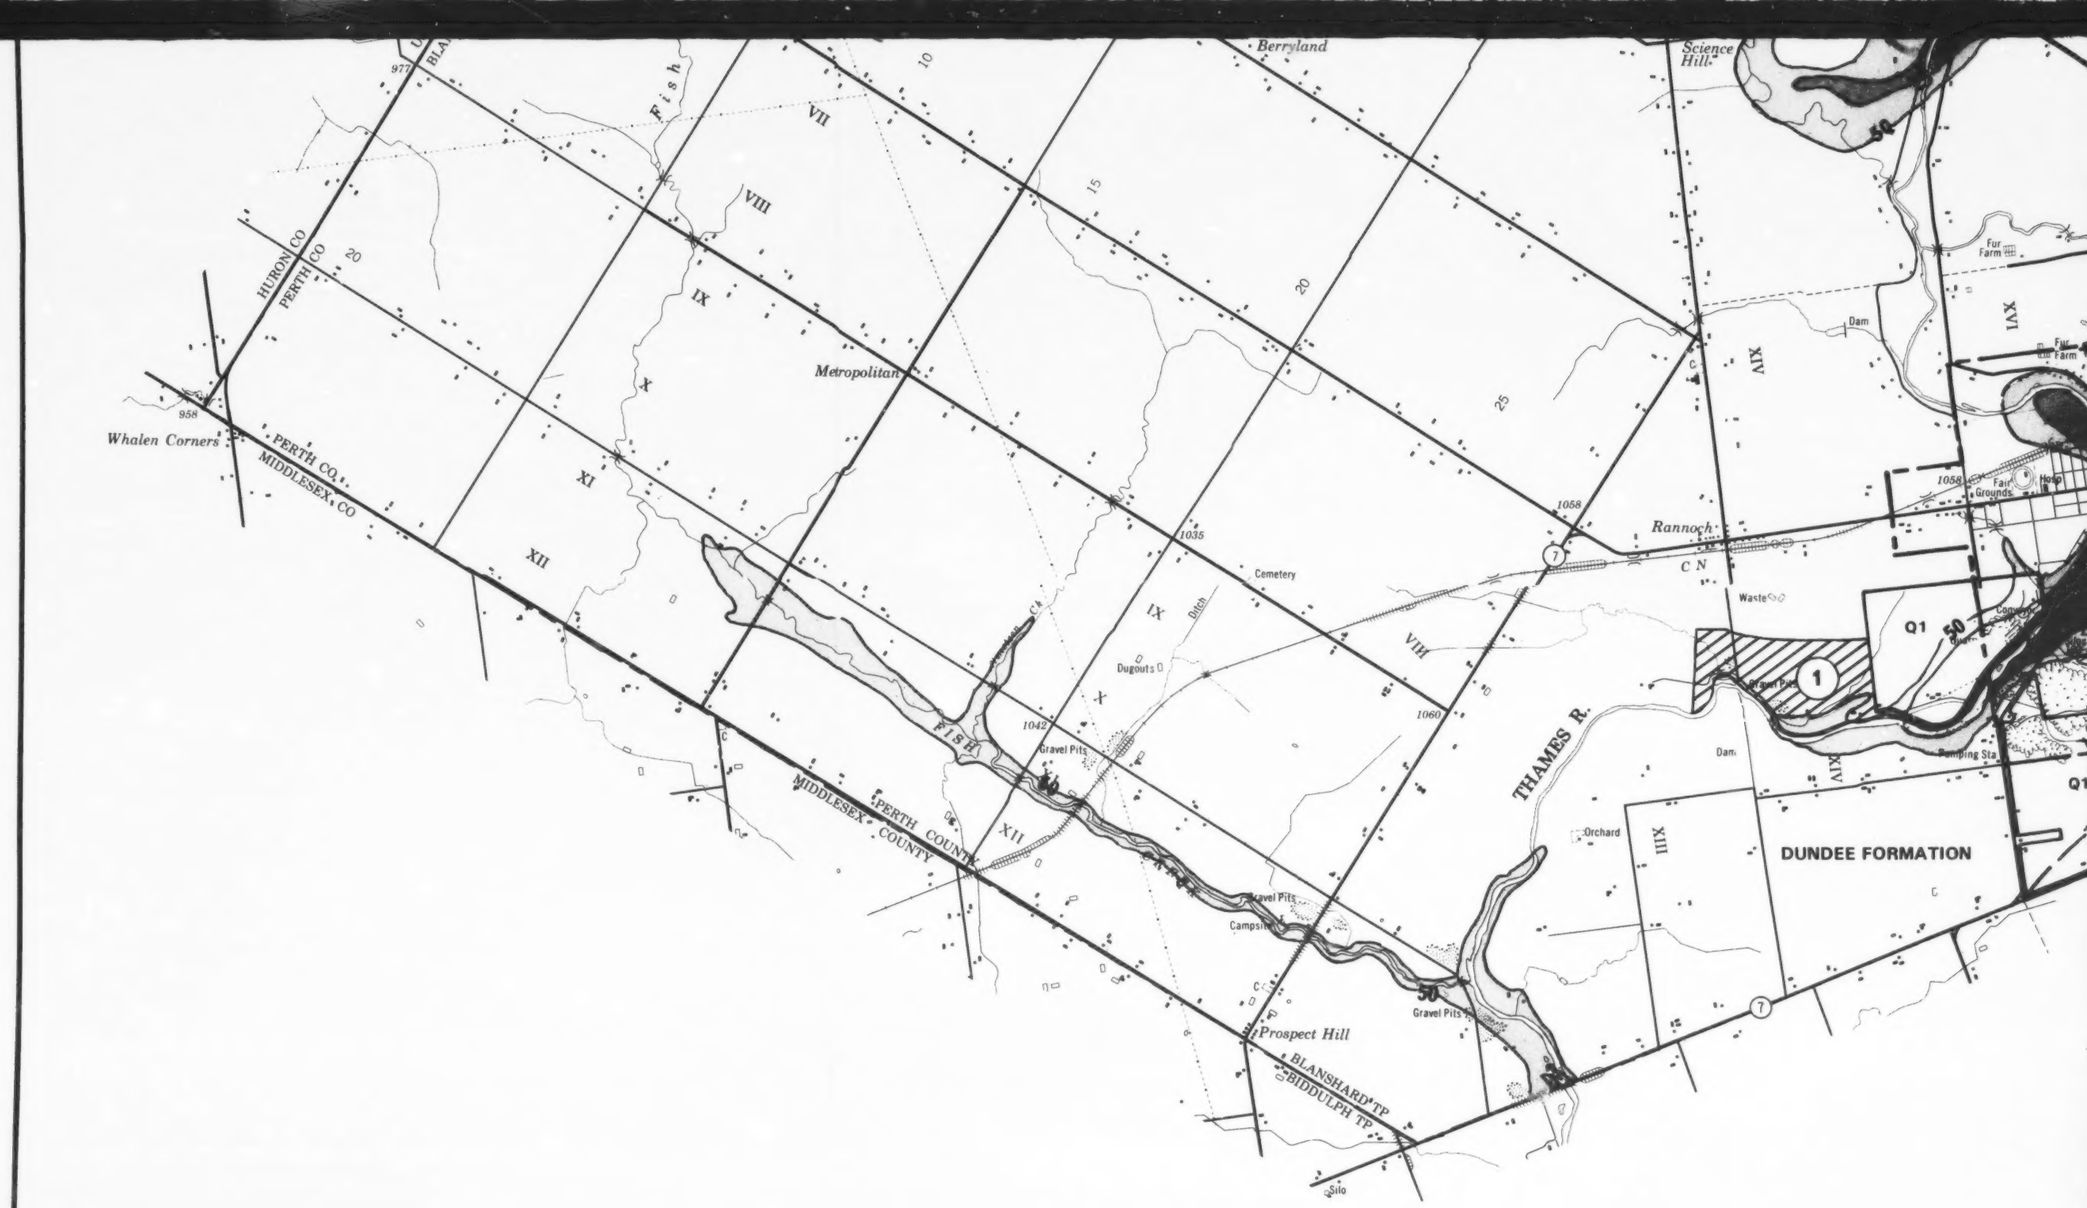
Berryland
Science Hill
Fish
HURON CO
PERTH CO
Whalen Corners
PERTH CO
MIDDLESEX CO
Metropolitan
Rannoch
Cemetery
Waste
Dugouts
Ditch
Gravel Pits
FISH
MIDDLESEX COUNTY
PERTH COUNTY
Gravel Pits
Campsite
Prospect Hill
BLANSHARD TP
BIDDULPH TP
Silo
THAMES R.
Dam
Pumping Sta
Orchard
DUNDEE FORMATION
Fur Farm
Fair Grounds
Horse
Q1
CN
VII
VIII
IX
X
XI
XII
XIII
XIV
XV
XIX
977
958
1058
1035
1042
1060

BLANSHARD

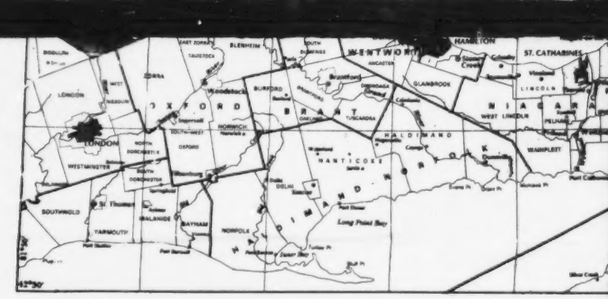

LEGEND

PALEOZOIC

DEVONIAN

MIDDLE DEVONIAN

DUNDEE FORMATION
Limestone

DETROIT RIVER GROUP
Limestone and dolostone

SYMBOLS

(Some symbols may not apply to this map.)

- Geological boundary.
- 25 — Drift thickness contour line (25 foot (8 m) interval).
- x — Isolated bedrock outcrop.
- Bedrock within 3 feet (1 m) of surface: see Table 4.
- Bedrock covered by 3 to 25 feet (1 m to 8 m) of overburden: see Table 4.
- Bedrock covered by .25 to 50 feet (8 m to 15 m) of overburden: see Table 4.
- (1) — Selected bedrock resource area; Deposit number: see Table 6.
- Q1 — Licenced quarry boundary; Property number: See Table 5.
- ●Q4 — Unlicenced quarry; Property number; See Table 5.
- O 27 — Selected drilling location indicating reported depth to bedrock (in feet).
- Municipal boundary.

SOURCES OF IN

Base map by Surveys and Mappi
Natural Resources.
Licence data from District and R
of Natural Resources.
Aggregate suitability data from t
Ontario Ministry of Transportation
Selected drilling data from the On
and the Petroleum Resources Sec
Resources.

Geology by D. F. Hewitt, 1972
P.F. Karrow, 1965, 19
P.F. Karrow and A.J. F
E.V. Sado and U.J. Va
B.V. Sanford, 1969

Compilation by P.A. Rizzuto and W.

Drafting by W.D. Fitzgerald

Issued 1980

This map is published with the p
Ontario Geological Survey.

This map is to accompany O.G.S
Paper 9.

BLANSHARD

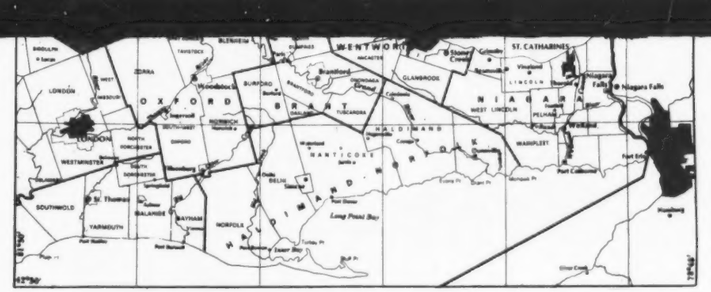

LEGEND

PALEOZOIC

DEVONIAN

MIDDLE DEVONIAN

DUNDEE FORMATION
Limestone

DETROIT RIVER GROUP
Limestone and dolostone

SYMBOLS

(Some symbols may not apply to this map.)

- Geological boundary.
- 25 — Drift thickness contour line (25 foot (8 m) interval).
- x — Isolated bedrock outcrop.
- Bedrock within 3 feet (1 m) of surface: see Table 4.
- Bedrock covered by 3 to 25 feet (1 m to 8 m) of overburden: see Table 4.
- Bedrock covered by 25 to 50 feet (8 m to 15 m) of overburden: see Table 4.
- (1) Selected bedrock resource area; Deposit number: see Table 6.
- Q1 Licenced quarry boundary; Property number: See Table 5.
- ●Q4 Unlicenced quarry; Property number; See Table 5.
- O 27 Selected drilling location indicating reported depth to bedrock (in feet).
- Municipal boundary.

SOURCES OF INFORMATION

Base map by Surveys and Mapping Branch, Ontario Ministry of Natural Resources.
Licence data from District and Regional Offices, Ontario Ministry of Natural Resources.
Aggregate suitability data from the Engineering Materials Office, Ontario Ministry of Transportation and Communications.
Selected drilling data from the Ontario Ministry of the Environment and the Petroleum Resources Section, Ontario Ministry of Natural Resources.

Geology by D. F. Hewitt, 1972
P.F. Karrow, 1965, 1977
P.F. Karrow and A.J. Ferguson, 1974 (Rev.)
E.V. Sado and U.J. Vagners, 1975
B.V. Sanford, 1969

Compilation by P.A. Rizzuto and W.D. Fitzgerald

Drafting by W.D. Fitzgerald

Issued 1980

This map is published with the permission of E.G. Pye, Director, Ontario Geological Survey.

This map is to accompany O.G.S. Aggregate Resources Inventory Paper 9.